



Collection 2026

LightPRO

New in our range



This handy light allows you to illuminate all the greenery in your garden to create a great mood. This is because this lighting fixture is partially flexible and can therefore be used in many different ways to provide illumination at the best angle. Focus on a beautiful statue, an attractive shrub, or large ornamental grasses. You decide!

Xible Hi (263S)

Aluminum - Black
LED 2.1 W
2,700 K
187 lm
900 x 40 x 40 mm (H x W x D)

90 cm



Smart

Let the Senso Smart illuminate the façade in a color that you like. This uplight can be operated entirely according to your wishes. Blue, red or rather bathed in a warm white light? The Lightpro app allows you to easily set the color of the light, its brightness, or what time it should turn on or off. Everything can be easily controlled from your own phone or tablet.



Senso Smart (Zigbee) (265N)

Aluminum - Black
LED 7 W
640 lm
39 x 162 x 31 mm (H x W x D)
Gateway required



The Lino is 60 cm high and equipped with a vertical LED strip that provides an even light, which is ideal for path lighting. Additionally, the brightness can be easily adjusted by manually setting it to one of six dimmer settings. The vertical light creates a contemporary look that is suitable for illuminating driveways, garden paths, and hedges.

Lino (264P)

Aluminum - Anthracite
LED 6 W
3,000 K
27 - 140 lm
600 x 40 x 40 mm (H x W x D)





The Honeycomb for the Castor and Juno is an accessory that ensures even light distribution and prevents glare, creating pleasant and appealing lighting. Made from high-quality material, this Honeycomb is durable and resistant to all weather conditions. If you want a focused beam of light that does not dazzle, choose the anti-glare hood.



Honeycomb Castor (252A)

Aluminum/plastic - Black

39 x 64 x 64 mm (H x W x D)

Easy to attach to the Castor 4, 8, and 9.

New



Honeycomb Juno (251A)

Aluminum/plastic - Black

33 x 50 x 50 mm (H x W x D)

Easy to attach to the Juno 2, 4, and Juno Tube.

New



Anti-glare hood (258A)

Aluminum - Black

110 x 64 x 64 mm (H x W x D)

For the Castor 4, 8 and 9.

New



Camera mounting kit (257A)

Aluminum - Black

33 x 50 x 50 mm (H x W x D)

Required for attaching the Camera Smart to the Multispike.

New

Place the Castor, Juno, or Camera Smart higher in the border with the adjustable Multispike. This handy spike enables you to place the spotlights and Camera Smart at different heights in the garden, ranging from 40 to 60 cm. Use the ground spike supplied with the Juno or Castor to secure the Multispike firmly in the ground. Would you like to use the Multispike in combination with Camera Smart? Then order the Camera Mounting Kit!



Multispike (253A)

Aluminum - Black

390 x 30 x 30 mm (H x W x D)

For placing Castor, Juno, or Camera Smart in a higher position. Height adjustable from 40 to 60 cm.


New



Decorative lights



Rodas (239R)
Aluminum - Black
LED 1.1 W (3x)
3,000 K
15 lm each
100 x 20 mm (H x Ø)
String of lights consisting of
3 lights each with 3 meters of cable.


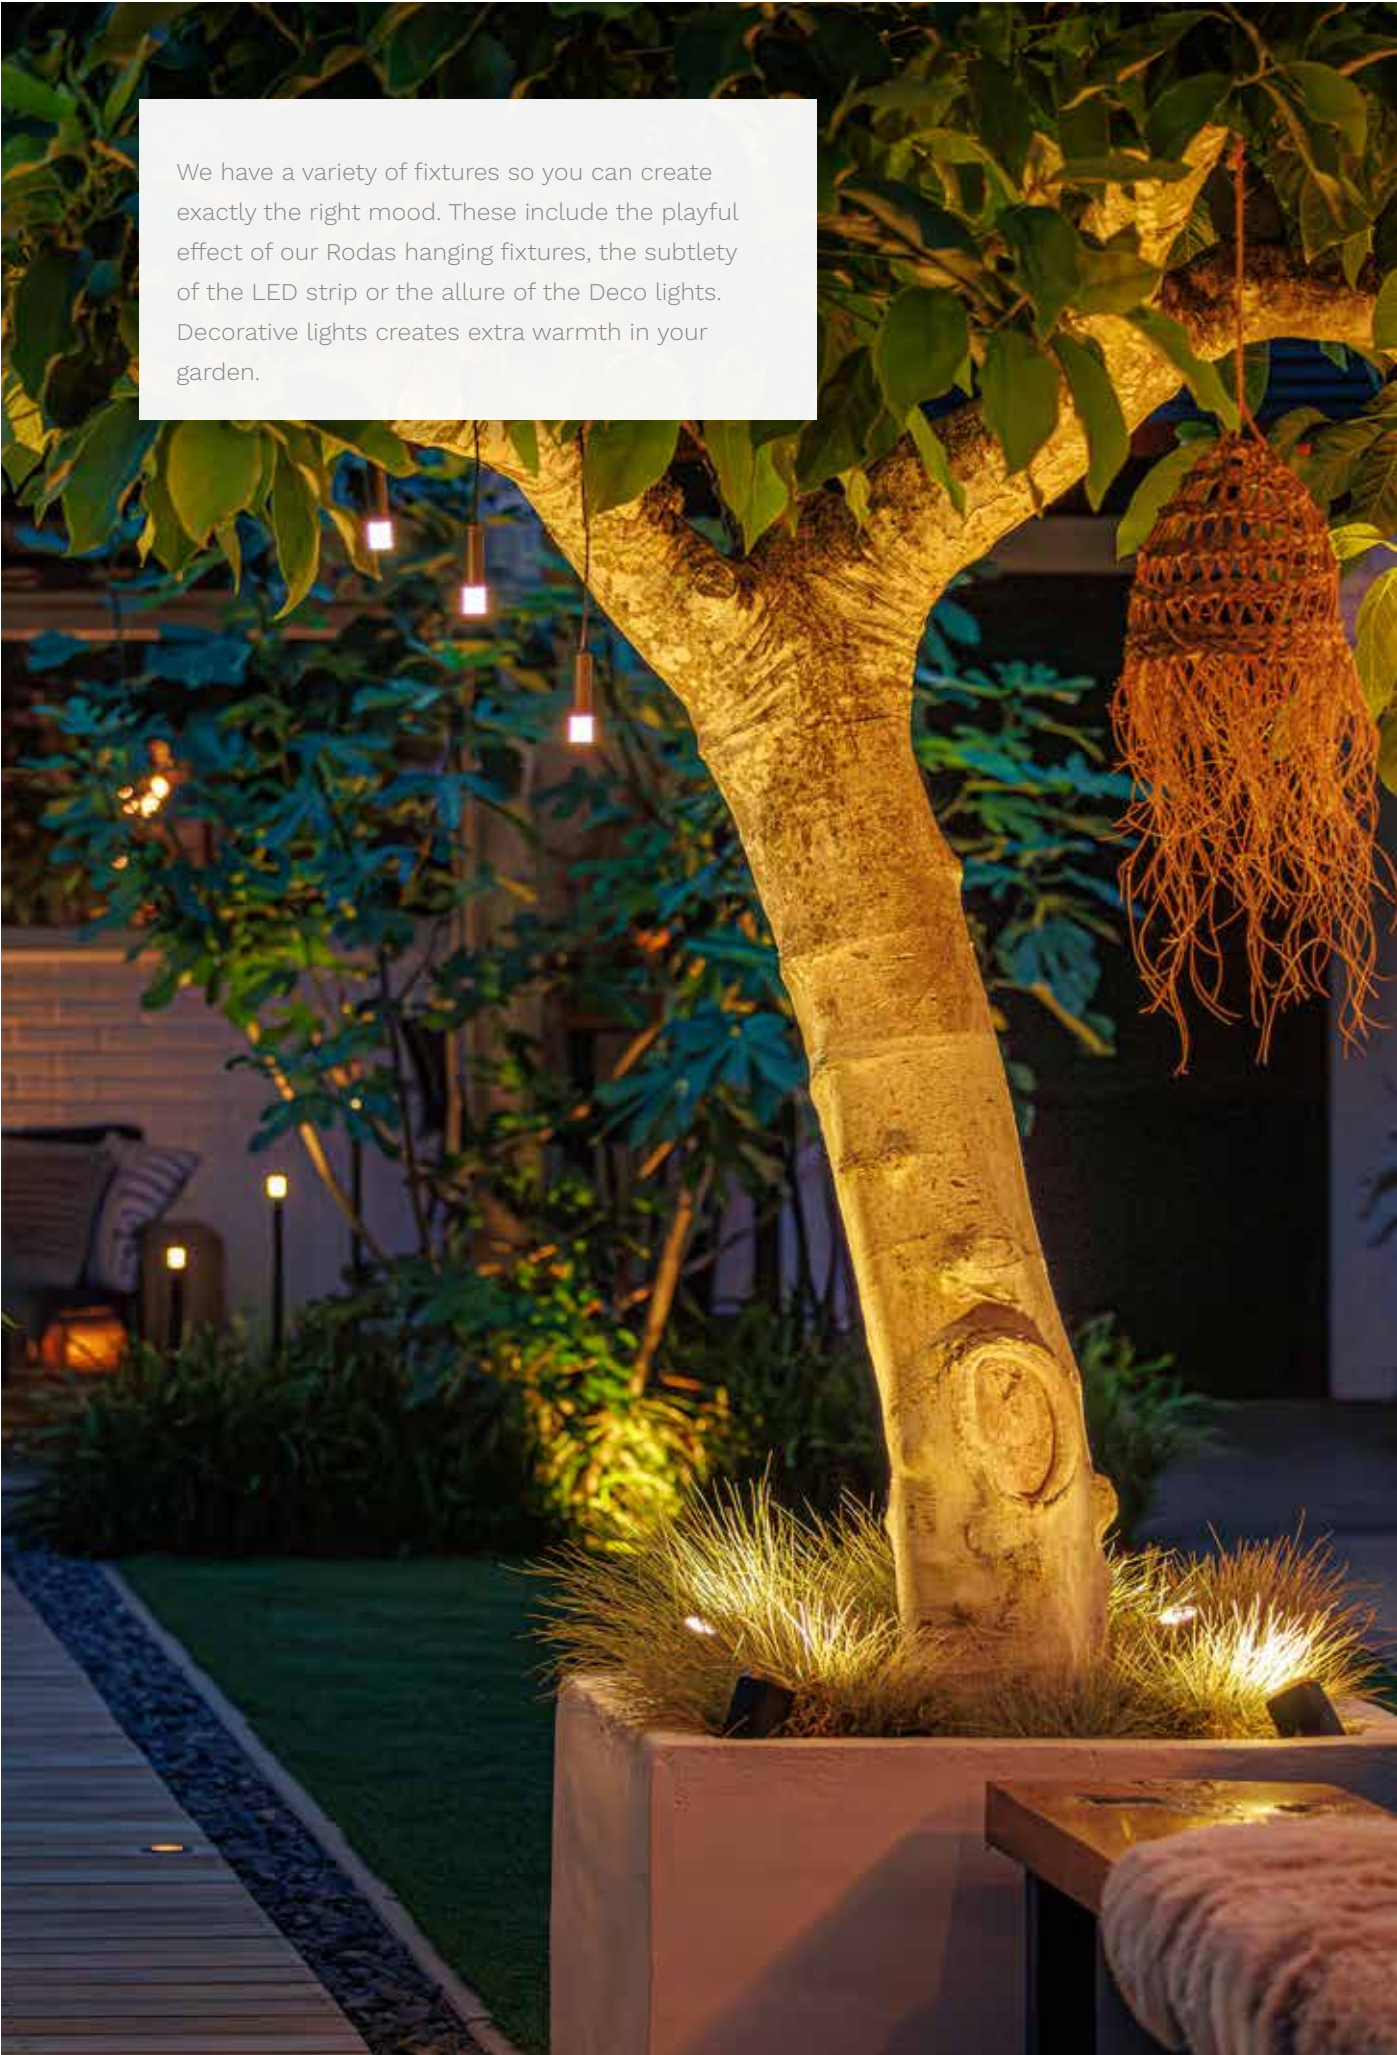


We have a variety of fixtures so you can create exactly the right mood. These include the playful effect of our Rodas hanging fixtures, the subtlety of the LED strip or the allure of the Deco lights. Decorative lights creates extra warmth in your garden.

The 15-meter LED strip can be cut to size. It's perfect for use alongside stairs, a border or in a canopy, for example. It increases safety and security in and around your garden, and enhances the atmosphere. The LED strip is easy to install using our LED strip clips.

LED strip (175L)

Plastic
LED 2.2 W (per meter)
3,000 K
90 lm / m
15 x 10 x 15,000 mm (H x W x D)

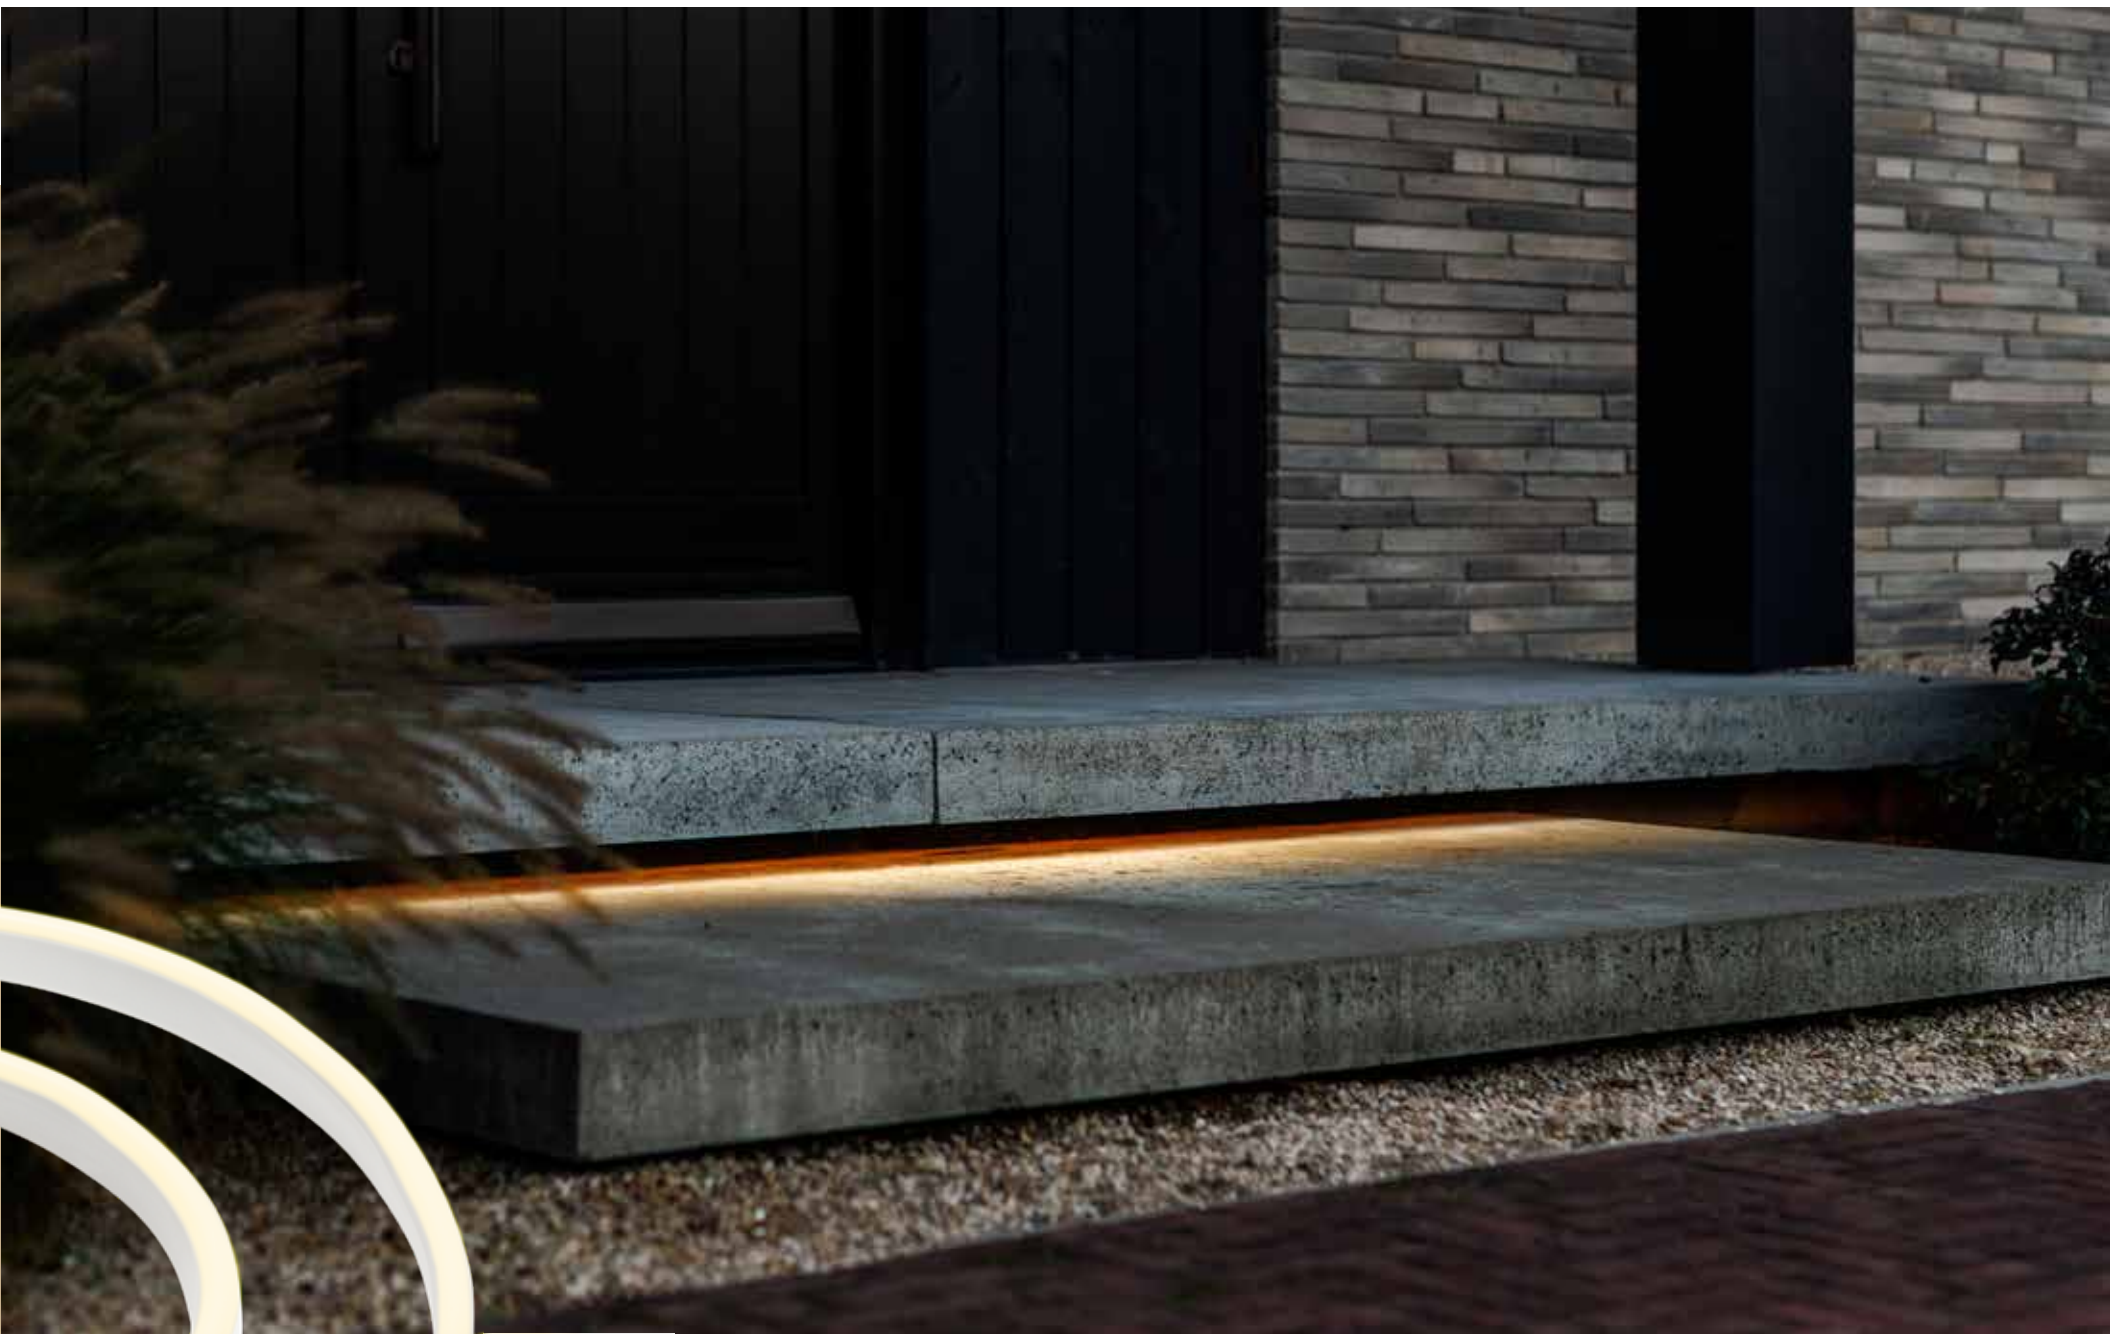

LED strip clips (250L)


Aluminum
60 pieces
Screws and plugs included.
9 x 11 x 17 mm (H x W x D)



LED strip connector (220L)

Plastic
27 x 27 x 60 mm (H x W x D)
Includes adhesive and end cap.

• Each light is supplied with Connector F as standard.

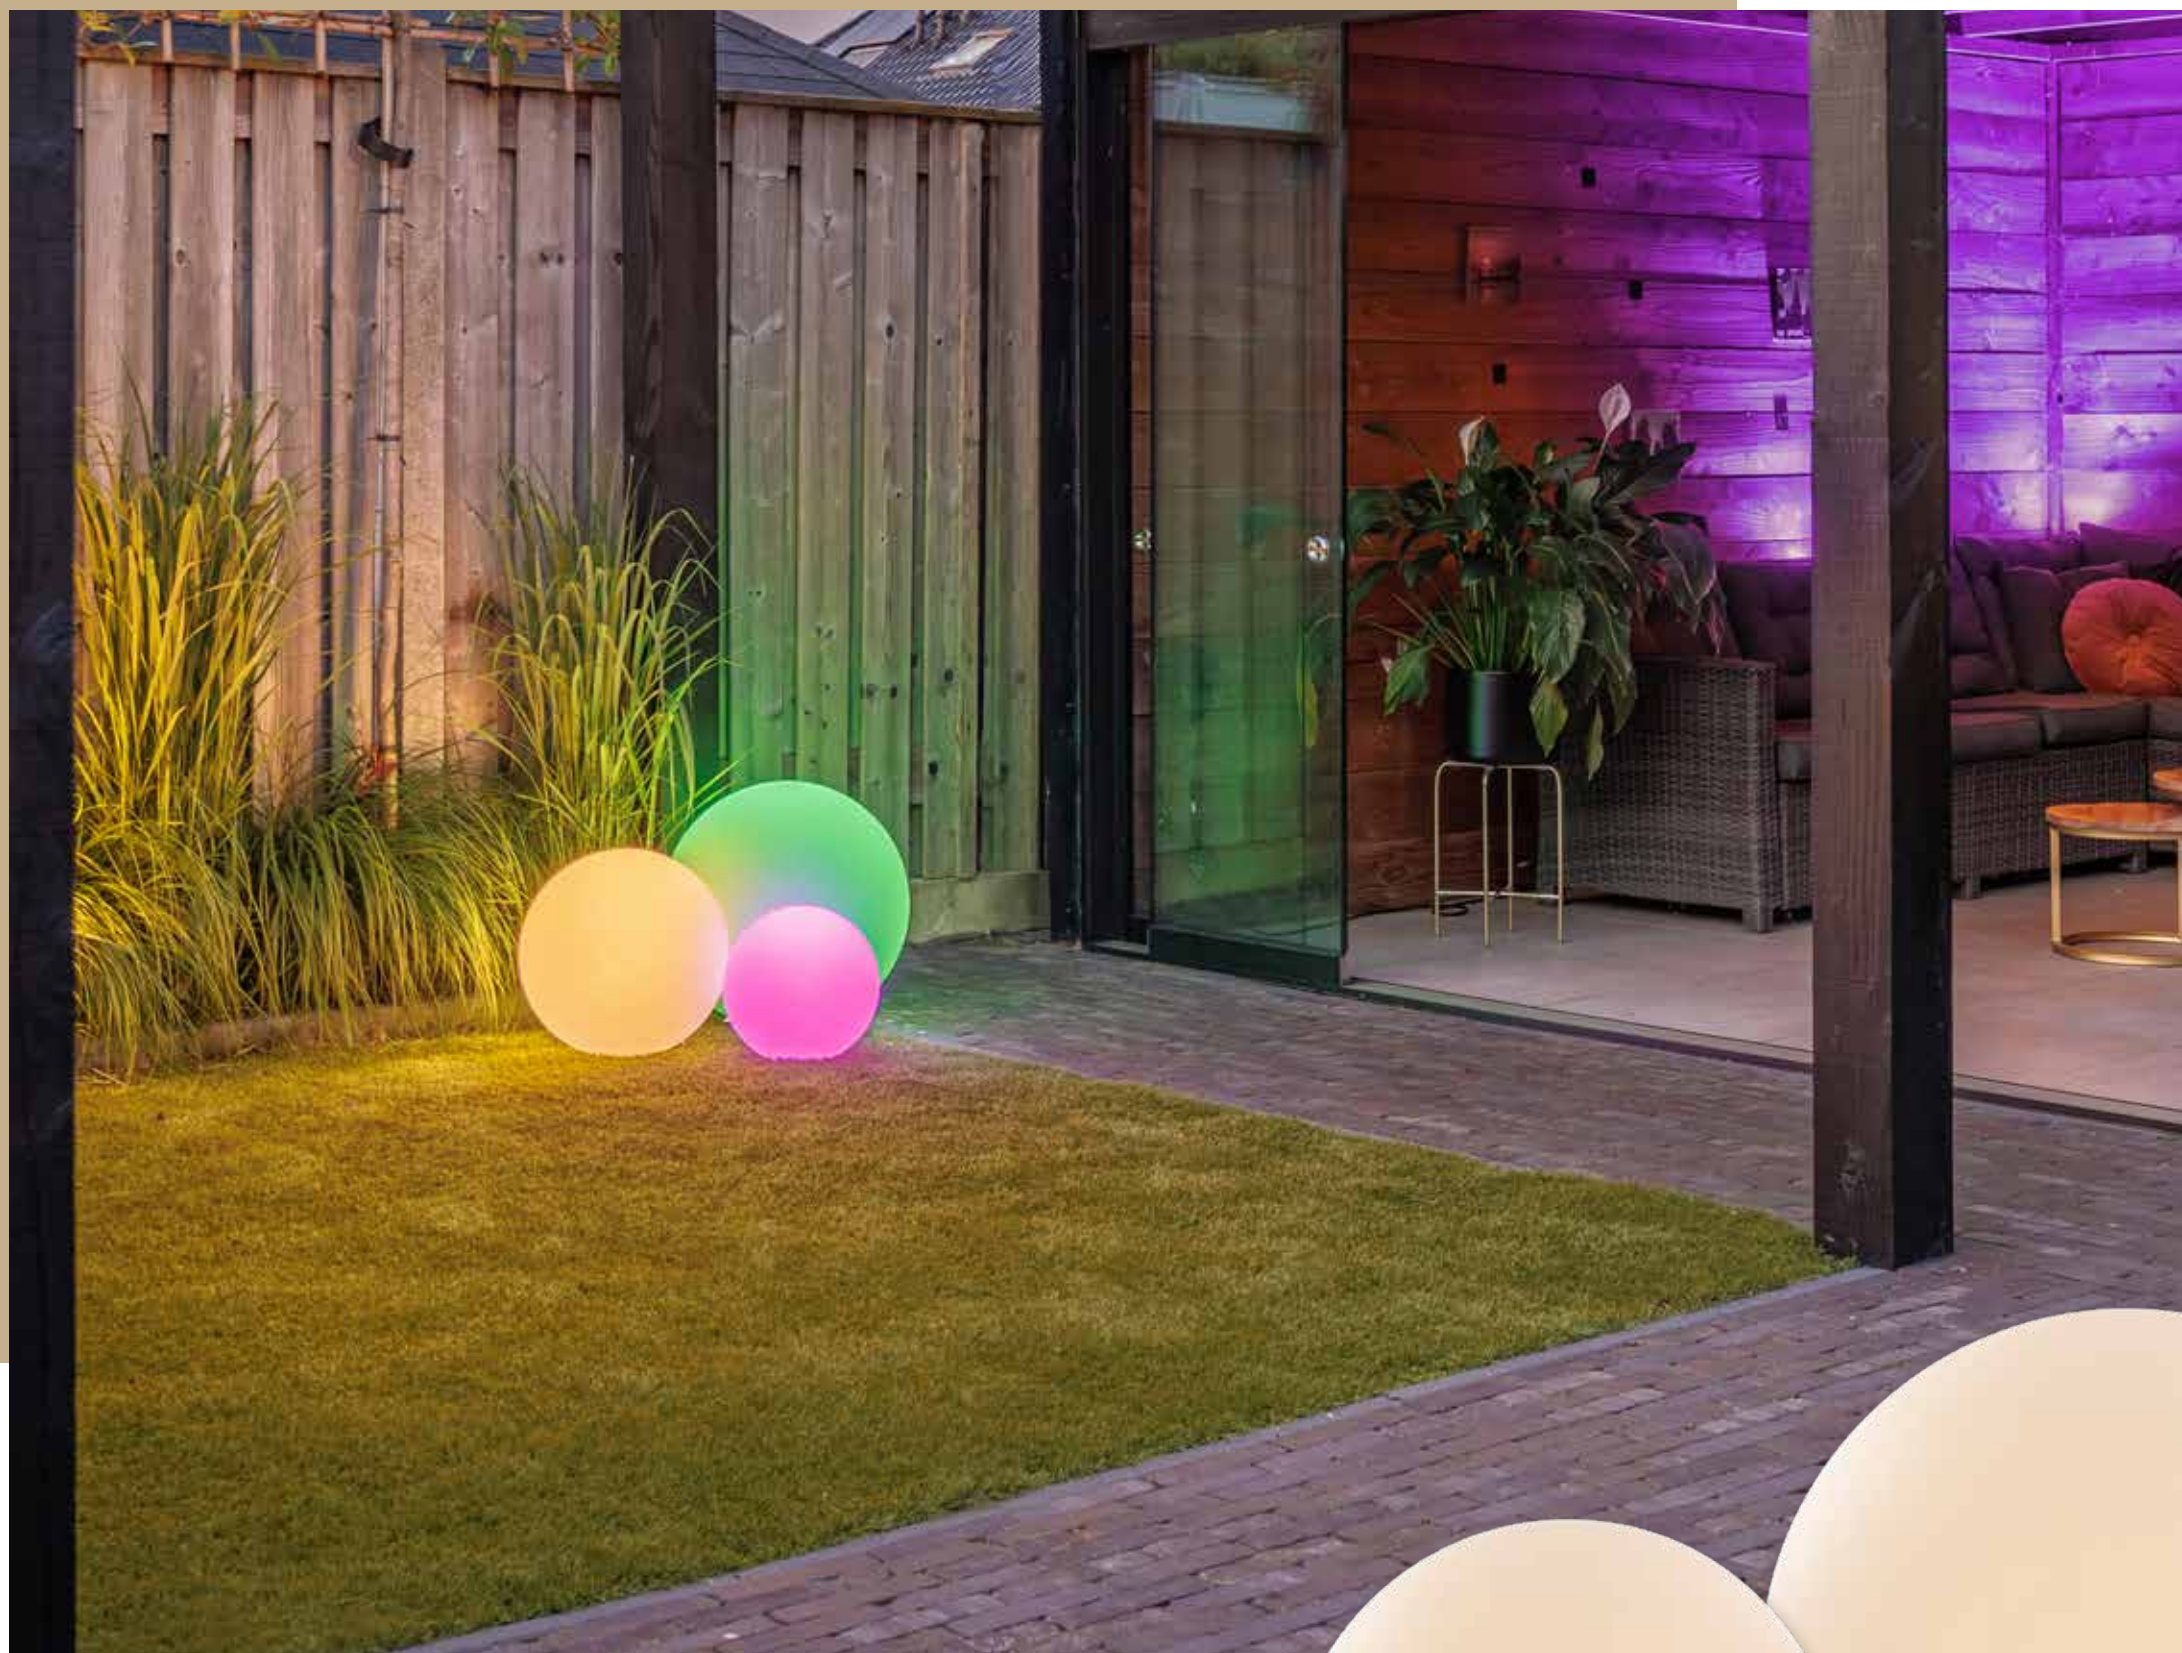**Deco 30 Smart (Zigbee) (254N)**

Polyethylene - White

LED 5 W

254 lm

300 mm (Ø)

Gateway required

Deco 40 Smart (Zigbee) (255N)

Polyethylene - White

LED 5 W

242 lm

400 mm (Ø)

Gateway required

Deco 50 Smart (Zigbee) (256N)

Polyethylene - White

LED 5 W

220 lm

500 mm (Ø)

Gateway required

With groundspike and feet, easy to place
on any surface.

Smart

spotlights

Tiga DL (209S)

Aluminum - Black

LED 4.2 W

3,000 K


9 - 85 lm

88 x 68 x 63 mm (H x W x D)



Can also be
used as a wall
light.

Want to attractively illuminate shrubs, trees and other objects? Then choose our spotlights with different lighting effects. Whether you want to illuminate a tree, accentuate a footpath, or beautifully light up your border, our spotlights offer a suitable solution. You'll literally be putting the feature 'in the spotlight'! If you prefer to play with the brightness, then our dimmable spotlights are what you're looking for.

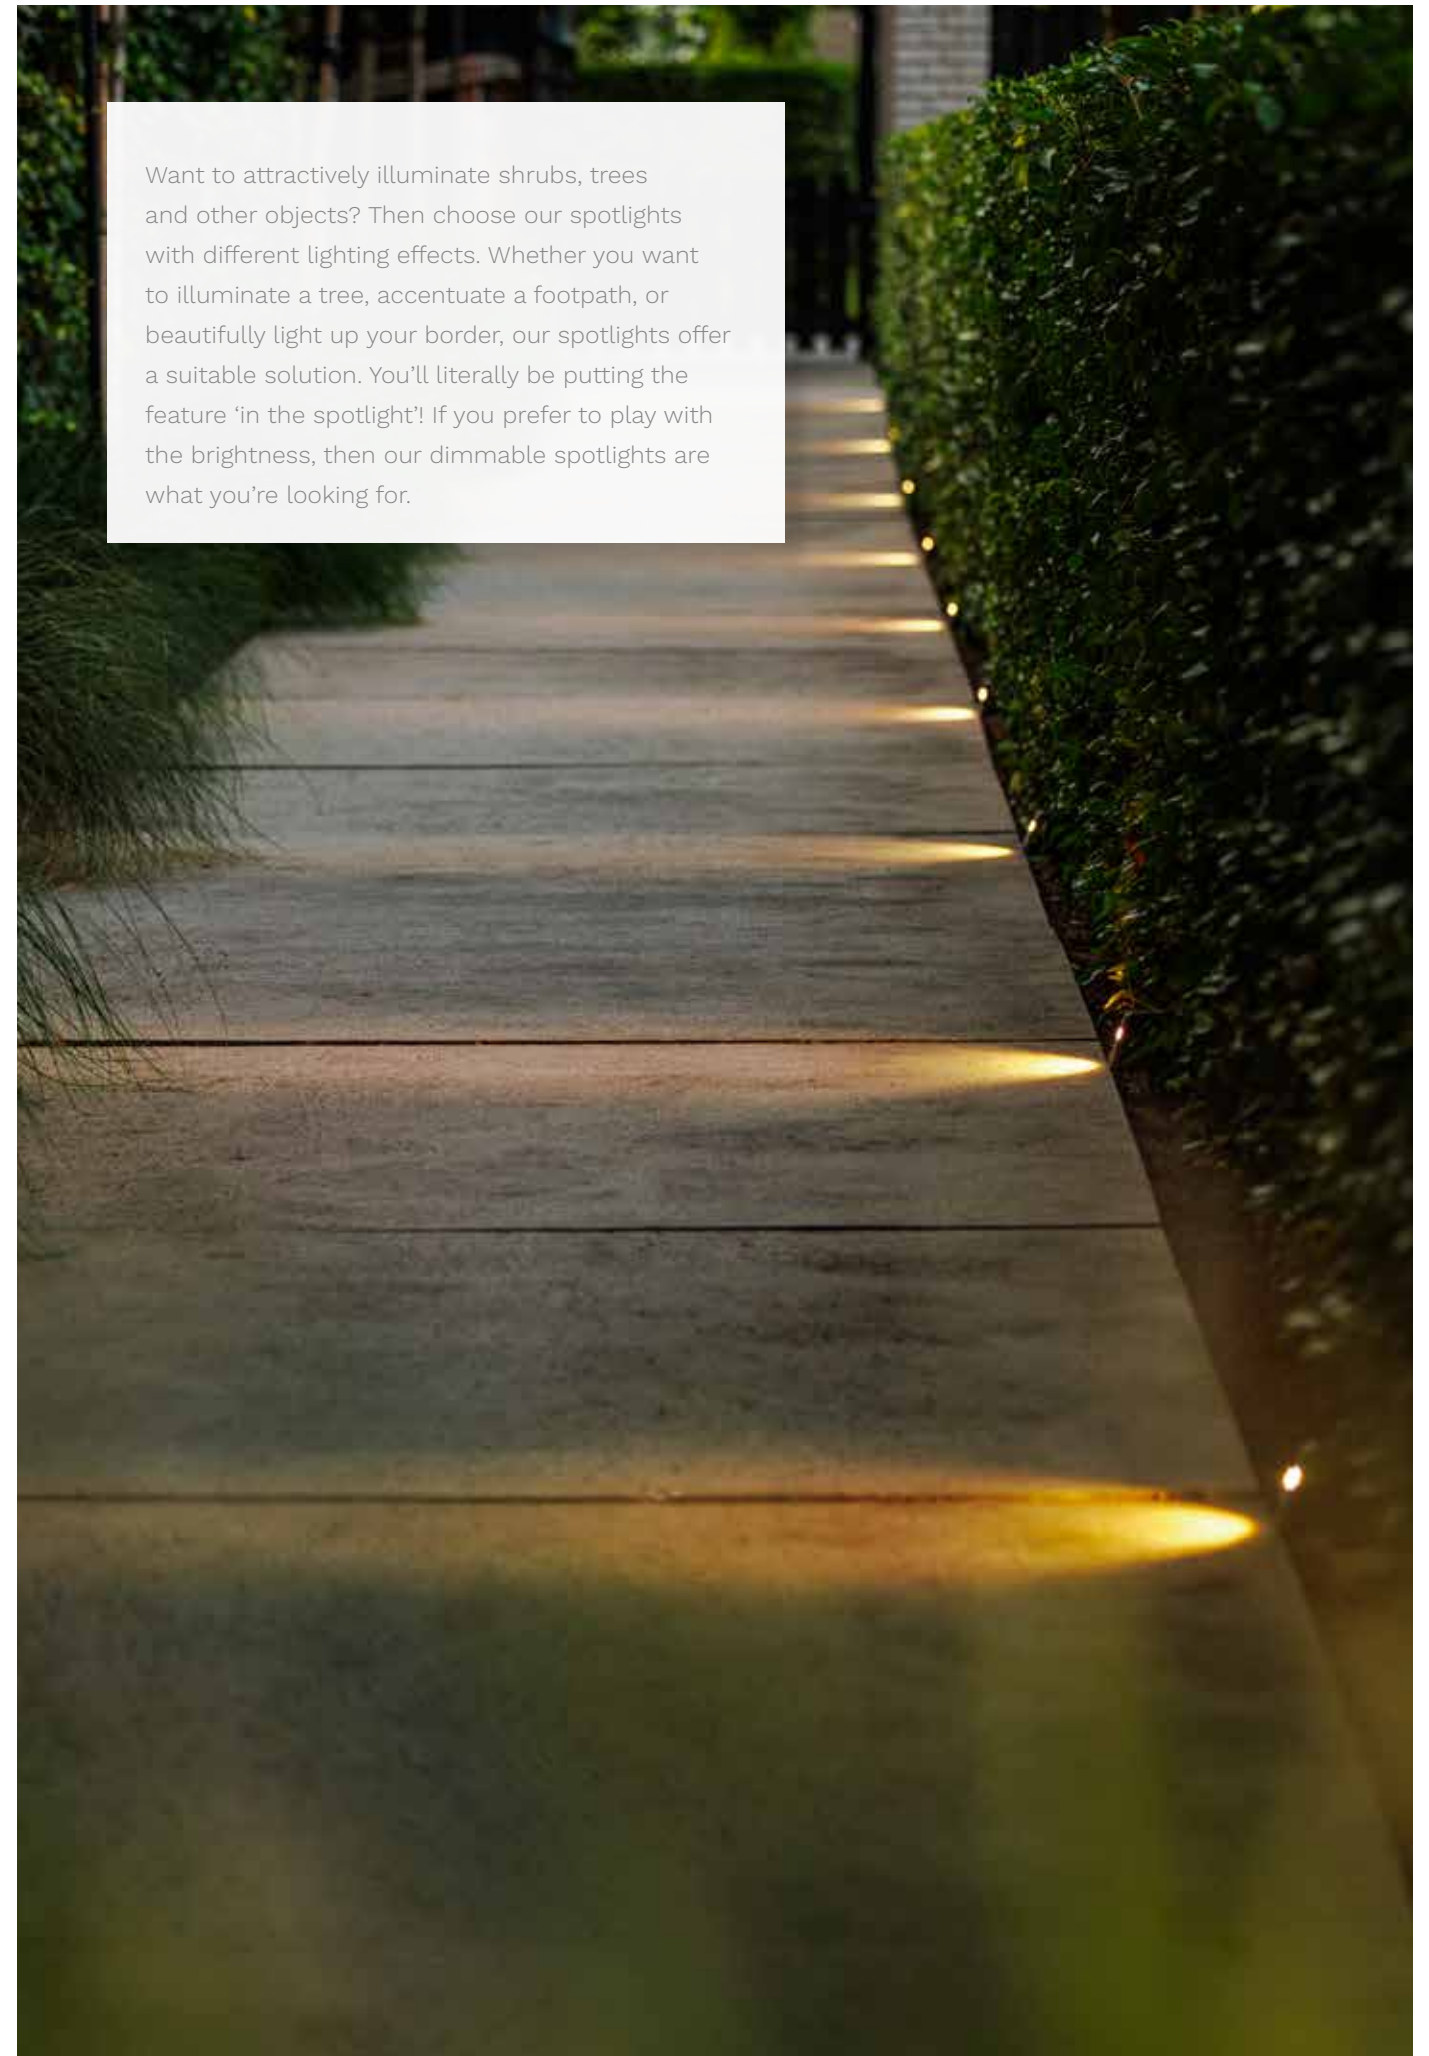



Multispike

See also our matching accessories for the Castor on pages 16 and 17.



Honeycomb



Anti-glare hood

**Castor 4 (178S)**

Aluminum - Anthracite

LED 3.5 W

3,000 K

40 - 415 lm

95 x 60 x 100 mm (H x W x D)

**Castor 8 (179S)**

Aluminum - Anthracite

LED 8 W

3,000 K

80 - 768 lm

95 x 60 x 115 mm (H x W x D)

**Castor 9 (180S)**

Aluminum - Anthracite

LED 9 W

3,000 K

65 - 670 lm

95 x 60 x 120 mm (H x W x D)

exchangeable
reflector

• Each light is supplied with Connector F as standard.



Juno 2 (193S)

Aluminum - Anthracite
LED 1.5 W
3,000 K
160 lm
85 x 55 x 68 mm (H x W x D)



Multispike

See also our matching accessories for the Juno on pages 16 and 17.



Honeycomb

The Tube can be used in combination with the Juno Tube and can either be placed in the ground or mounted on a wall using the accessories supplied.

Tube (215A)

Aluminum - Anthracite
1,200 x 20 mm (H x Ø)



Juno 4 (194S)

Aluminum - Anthracite
LED 4 W
3,000 K
356 lm
85 x 55 x 68 mm (H x W x D)



Juno Tube (213S)

Aluminum - Anthracite
LED 4 W
3,000 K
356 lm
85 x 55 x 68 mm (H x W x D)



Flexible

New

**Xible Hi (263S)**

Aluminum - Black

LED 2.1 W


2,700 K

187 lm

900 x 40 x 40 mm (H x W x D)

This handy light allows you to beautifully illuminate all the greenery in your garden. The fixture is flexible and therefore easy to bend, enabling you to illuminate features at exactly the right angle. Put the accent on a beautiful statue or lovely shrub! The fixture is easy to move and can also be easily inserted into the ground using the supplied spike. Additionally, the Xible can also be used as a wall light, making it versatile for use in any outdoor space.

Flexible

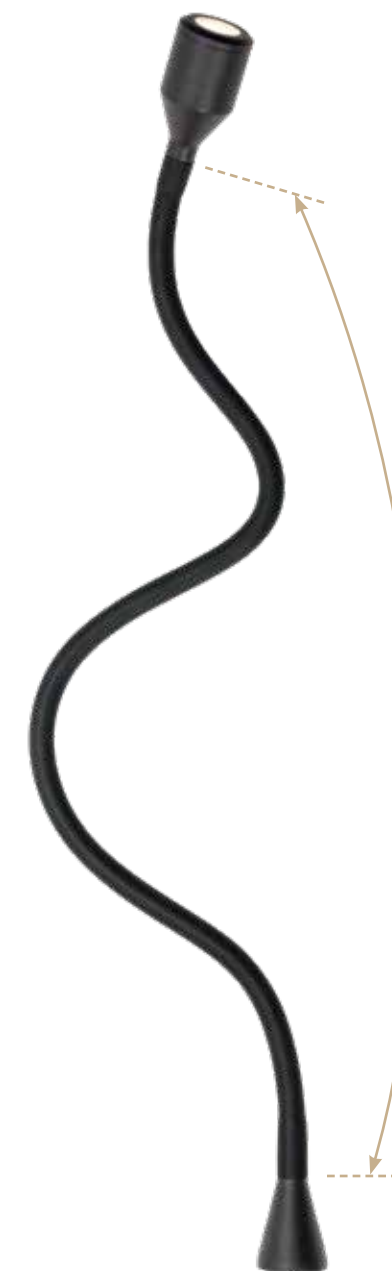**Xible (224S)**

Aluminum - Black

LED 2 W

2,700 K


153 lm

695 x 36 mm (H x Ø)

Can also be used as a wall light.

Pond lighting

The Nilus is an underwater spotlight whose design matches that of the Castor and Juno. The protection class of Nilus is IP68. This makes the light suitable for permanent underwater use up to half a meter. The Nilus stays firmly in place in a pond thanks to its weighted base.

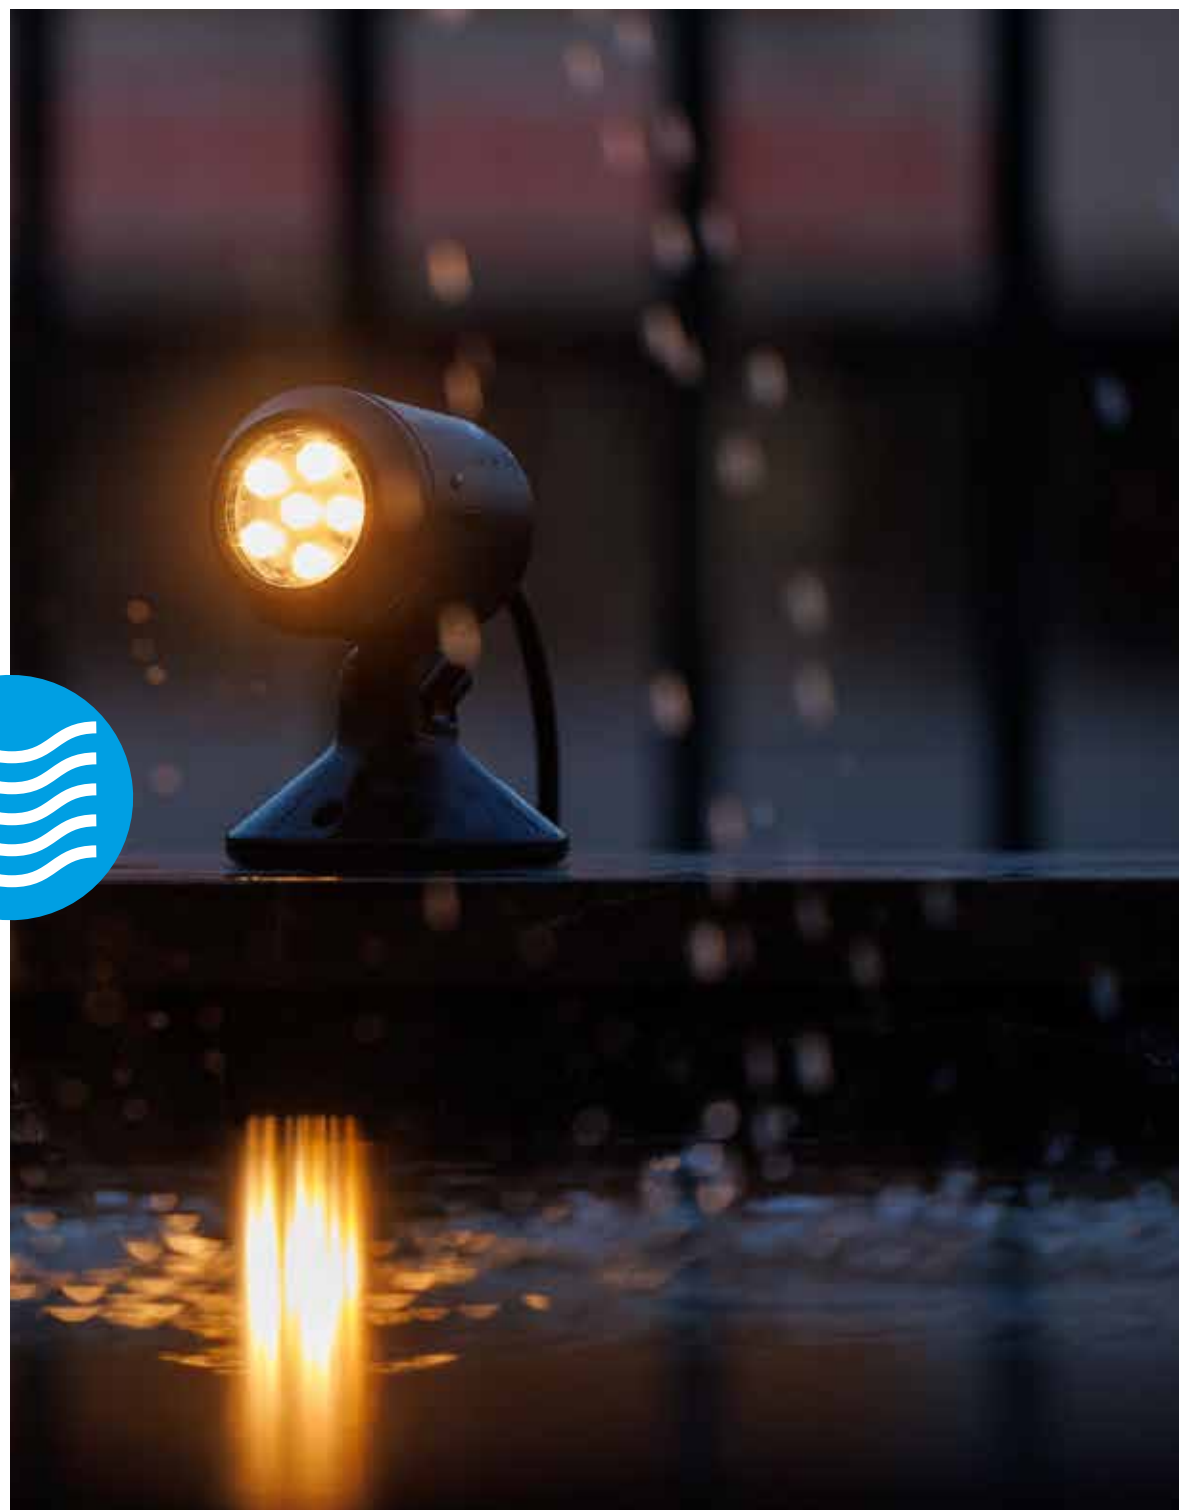**Nilus (210S)**

ABS - Black
LED 3.4 W
3,000 K
420 lm
135 x 95 x 110 mm (H x W x D)

**Avior (181S)**

Aluminum - Anthracite
LED 16 W
3,000 K
150 - 1,007 lm
125 x 180 x 68 mm (H x W x D)

**Quartz (196W)**

Aluminum - Black
LED 1.8 W
3,000 K
137 lm
105 x 50 x 88 mm (H x W x D)
Can also be used as a wall light.



A perfect spotlight for illuminating trees and large objects.
Illuminates up to 20 meters!

Decklights

Onyx 90 RA (245D)

Aluminum - Anthracite

LED 2 W

2,700 K


18 lm


59 x 105 mm (H x Ø)

Drill hole 90 mm



Our extensive range of premium lighting offers the best solution for every garden. Do you want a beautifully lit walkway or a stunning starry path in your garden? Use several Lightpro decklights to create your own dream garden. Simply place them in tiling, decking, or even gravel or soil.

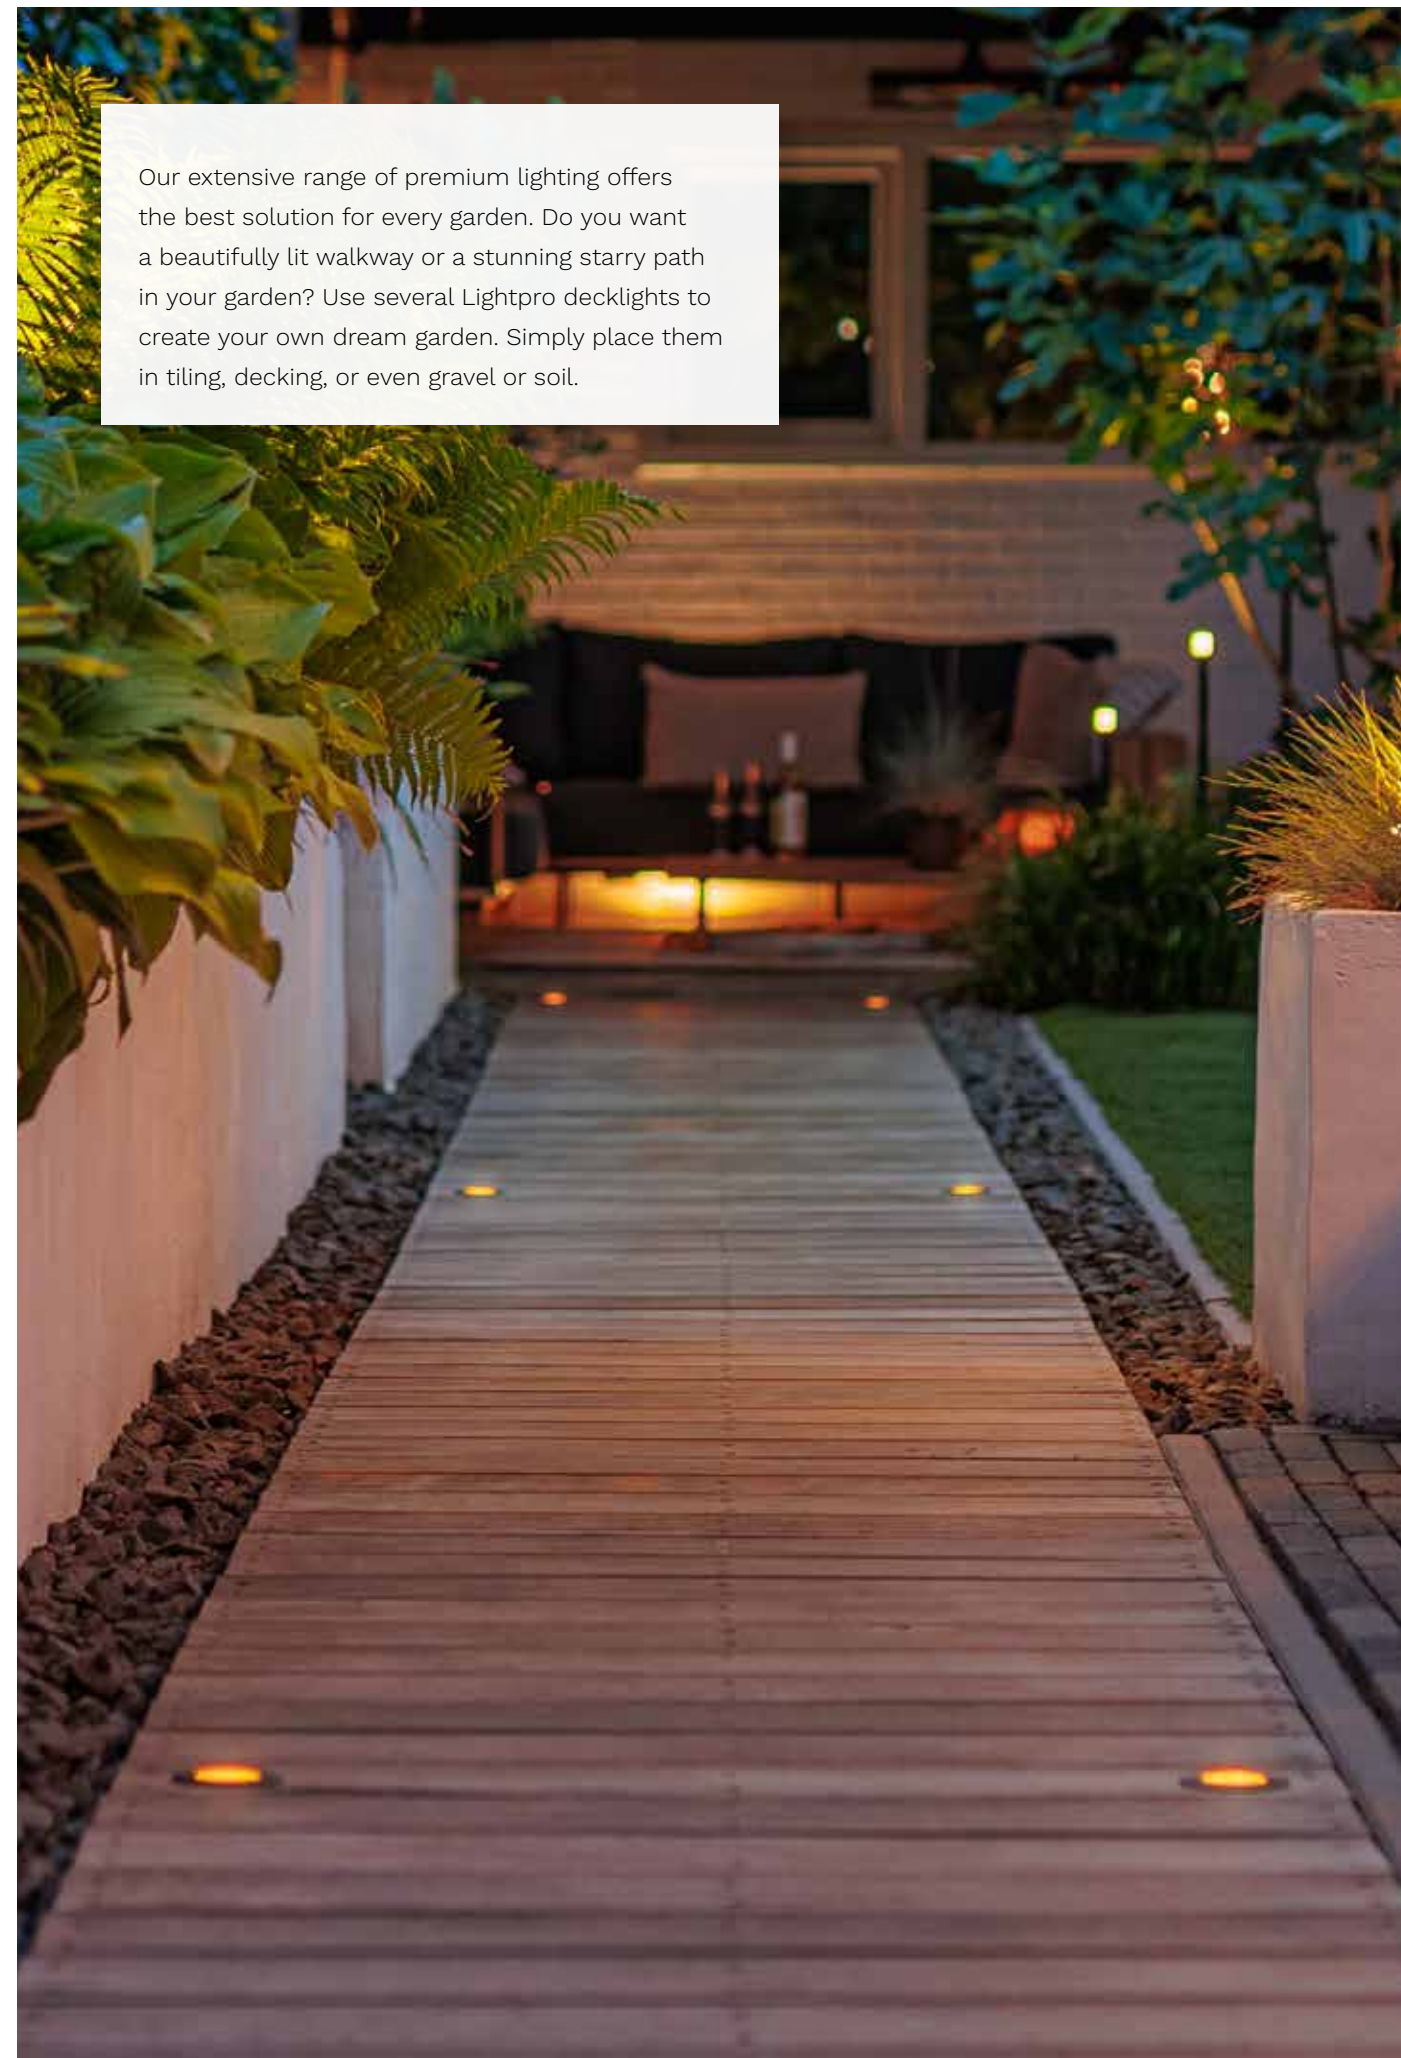

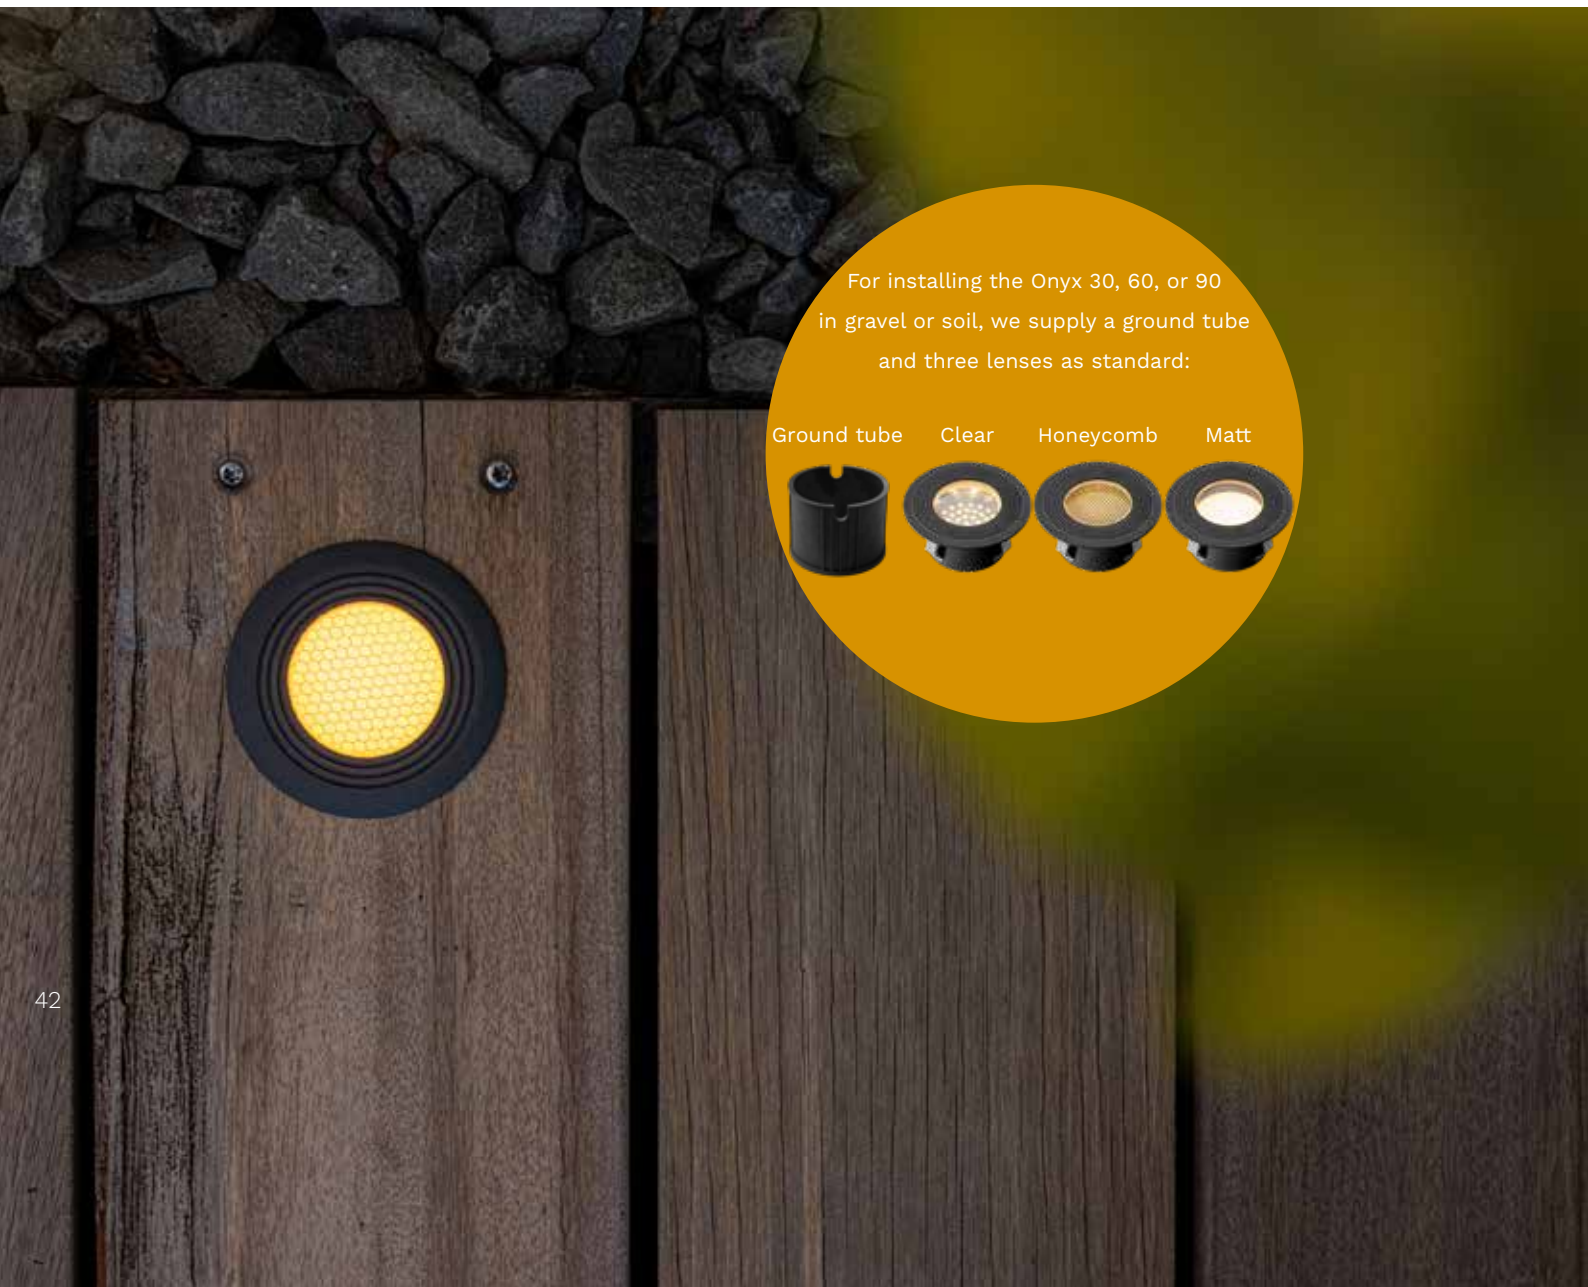

For installing the Onyx 30, 60, or 90 in gravel or soil, we supply a ground tube and three lenses as standard:

Ground tube Clear Honeycomb Matt



Onyx 20 Sleeve (237A)
Aluminum - Black
35 x 31 mm (H x Ø)
Drill hole 25 mm
Combine this Sleeve with the Onyx 20 for a stylish look.



Onyx 20 (212D)
Plastic - Black
LED 0.3 W
2,700 K
1 lm
33 x 20 mm (H x Ø)
Drill hole 20 mm



Onyx 30 RS (240D)
Stainless steel 316
LED 0.5 W
2,700 K
1 lm
59 x 45 mm (H x Ø)
Drill hole 30 mm



Onyx 30 RA (241D)
Aluminum - Anthracite
LED 0.5 W
2,700 K
1 lm
59 x 45 mm (H x Ø)
Drill hole 30 mm



Onyx 60 RS (242D)
Stainless steel 316
LED 1 W
2,700 K
5 lm
59 x 75 mm (H x Ø)
Drill hole 60 mm



Onyx 60 RA (243D)
Aluminum - Anthracite
LED 1 W
2,700 K
5 lm
59 x 75 mm (H x Ø)
Drill hole 60 mm



Onyx 90 RS (244D)
Stainless steel 316
LED 2 W
2,700 K
18 lm
59 x 105 mm (H x Ø)
Drill hole 90 mm



Onyx 90 RA (245D)
Aluminum - Anthracite
LED 2 W
2,700 K
18 lm
59 x 105 mm (H x Ø)
Drill hole 90 mm



Nomia (207U)

Aluminum - Black

LED 3 W

3,000 K


344 lm

125 x 90 mm (H x Ø)

Drill hole 70 mm

Includes ground tube

A tree or shrub properly illuminated makes for a spectacular sight. And this is easy to do yourself by installing uplights. Want to bet you take a peek into your garden more often?

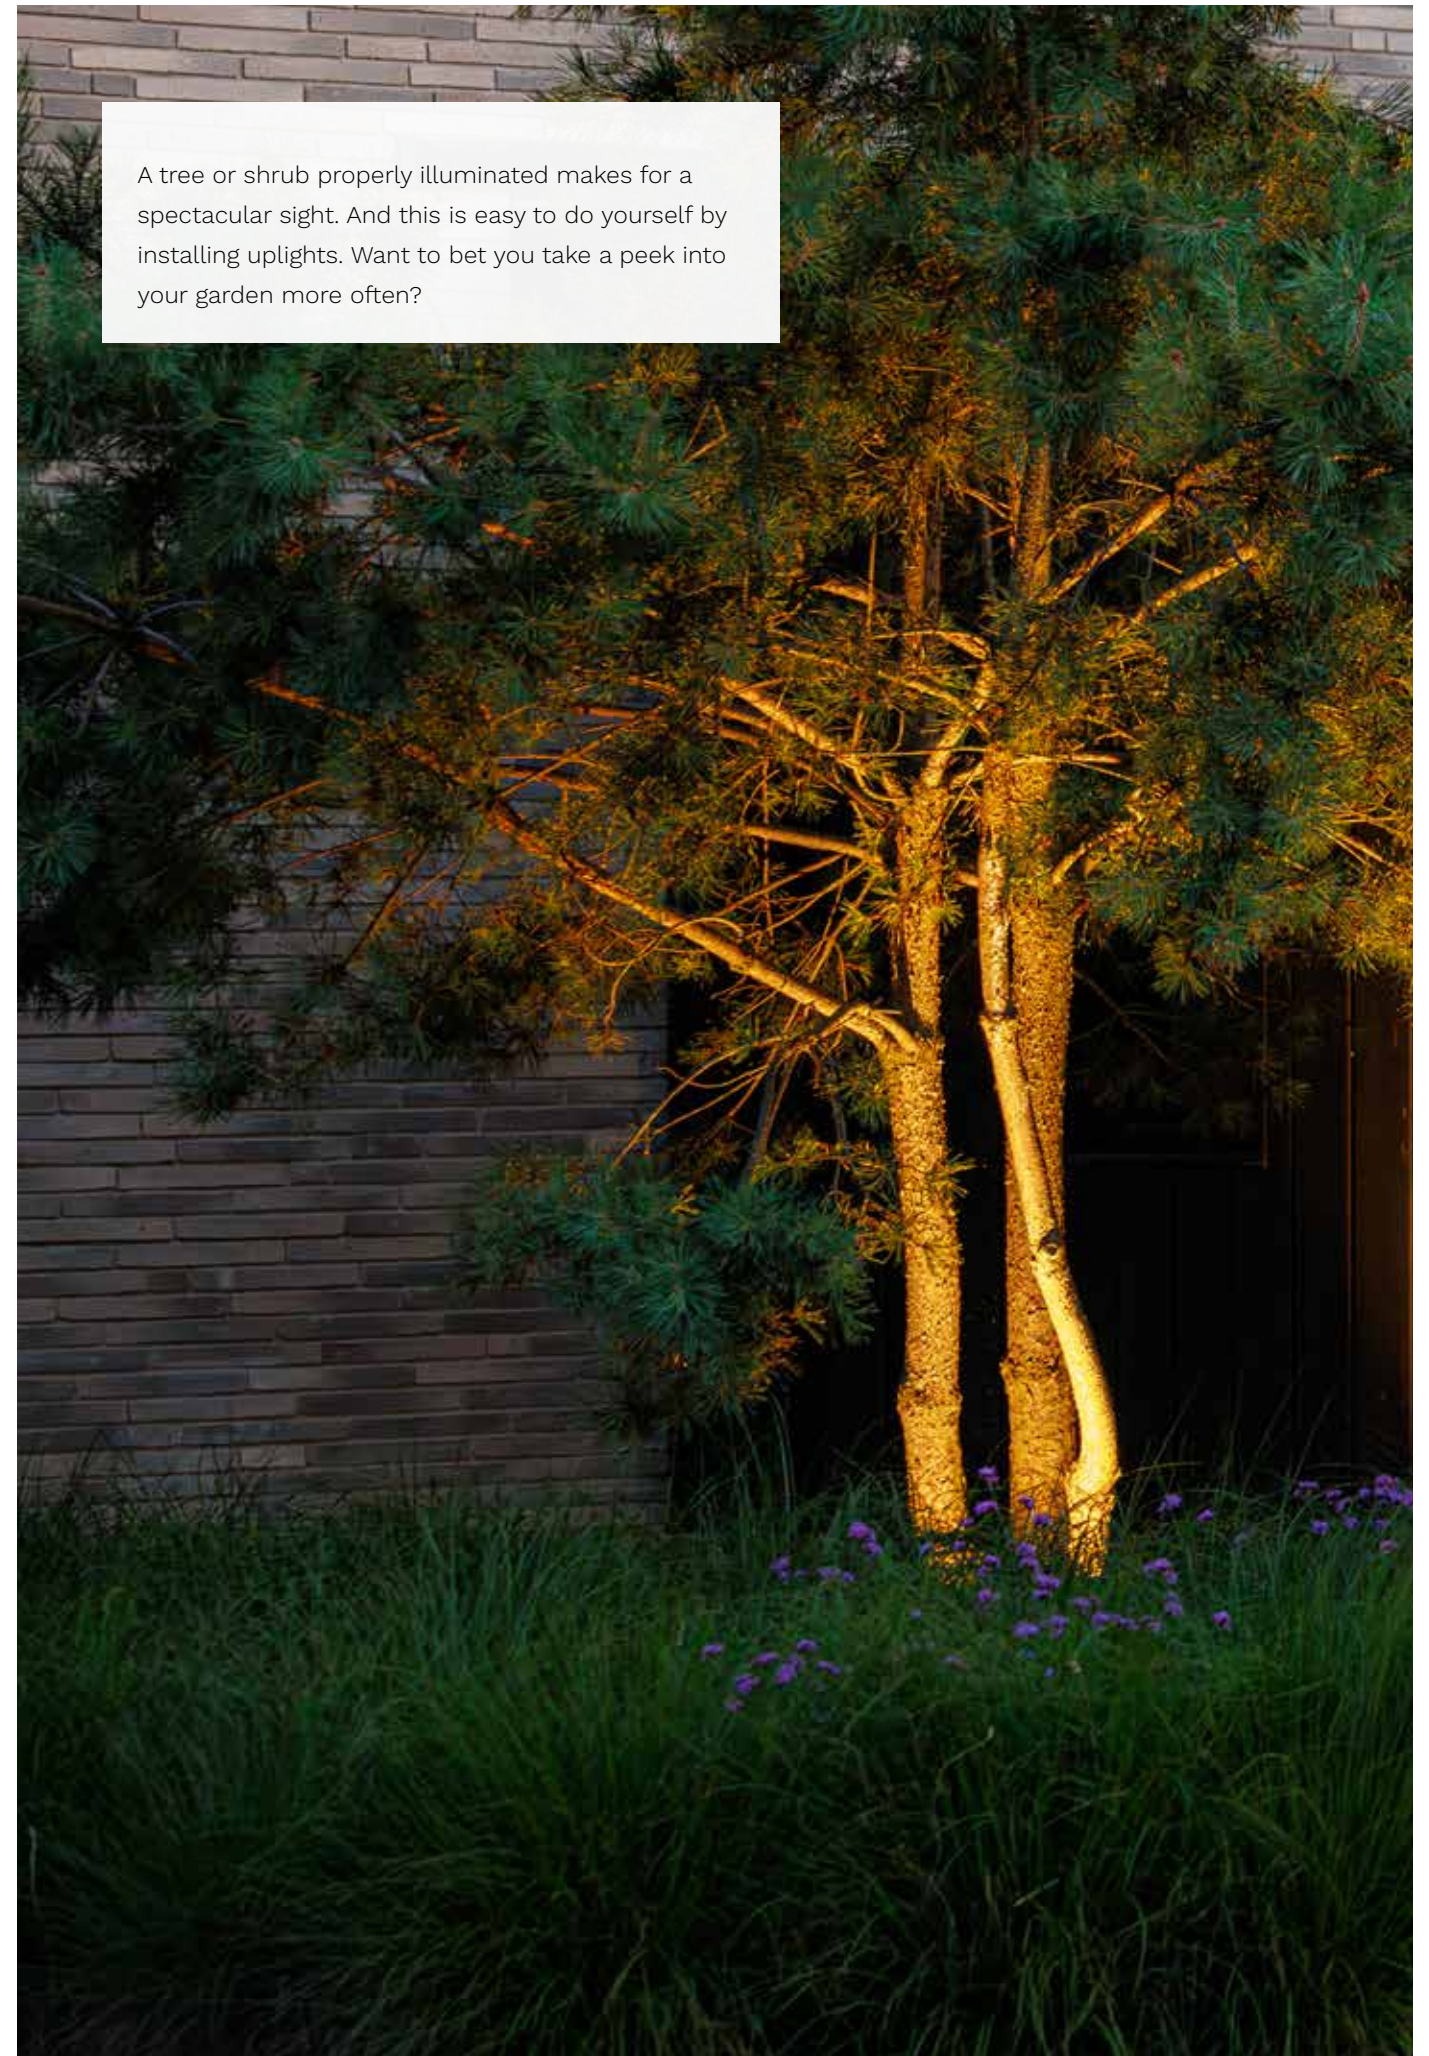

The Atik R1 is a powerful light source for highlighting a tree or object.

Atik R1 (186U)

Aluminum - Black

LED 9 W

3,000 K

65 - 713 lm

135 x 120 mm (H x Ø)

Drill hole 100 mm

Includes ground tube



DIMMABLE





exchangeable
reflector

46



Adjustable light source

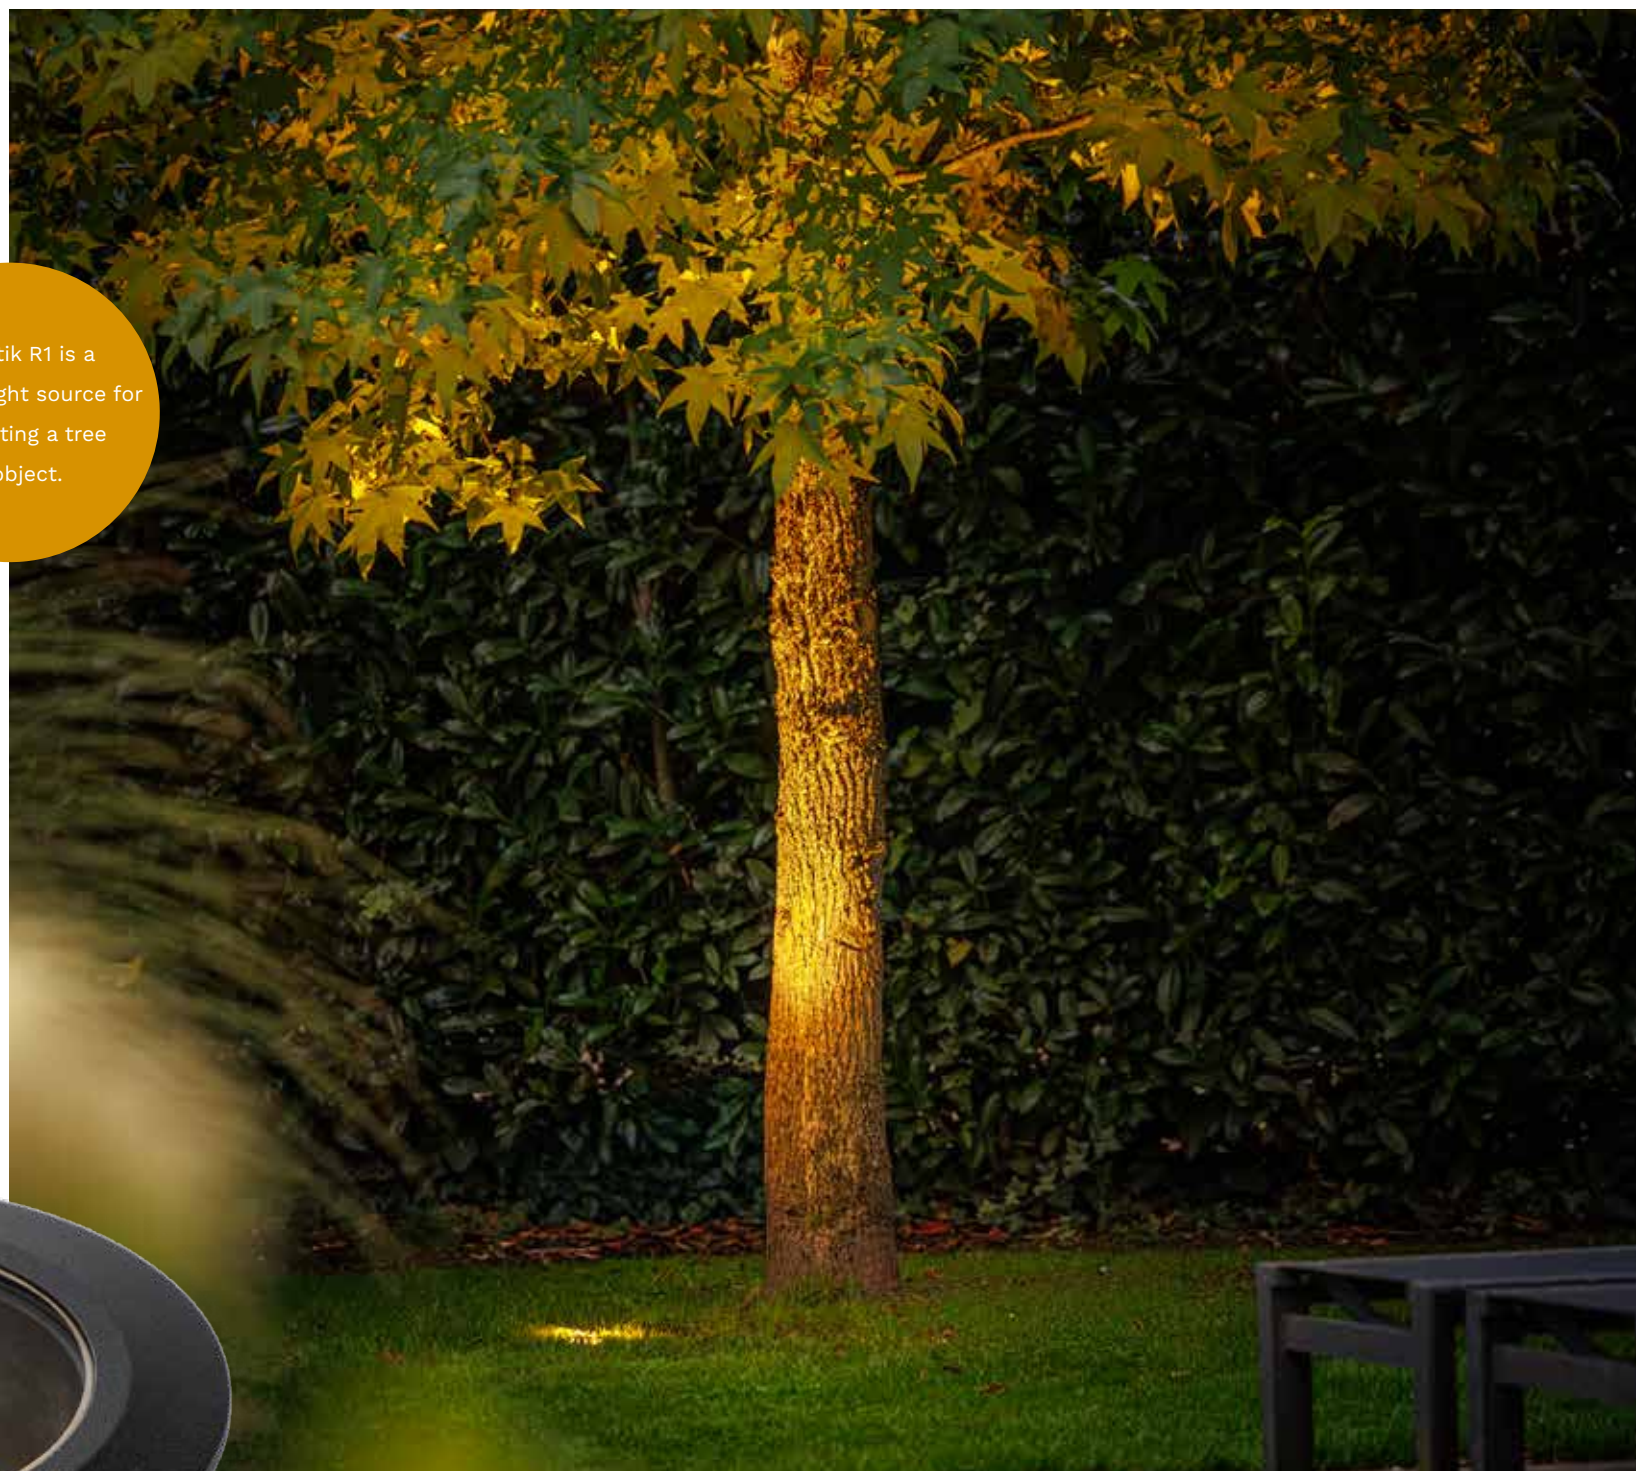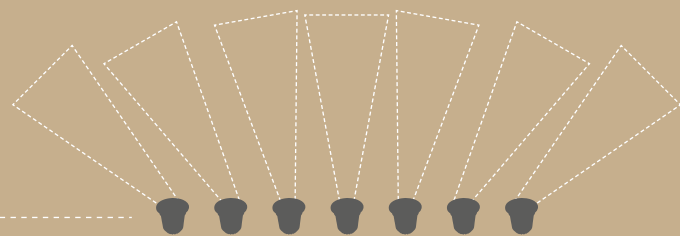

47



Agate (102U)

Stainless steel 316

LED 2.6 W

3,000 K

195 lm

113 x 115 mm (H x Ø)

Drill hole 90 mm

Includes ground tube

• Each light is supplied with Connector F as standard.

Post lights



Oberon DL (192P)


Aluminum - Anthracite

LED 9 W

3,000 K


75 - 288 lm


600 x 93 x 110 mm (H x W x D)



The Oberon DL comes with 3 additional faceplates. With these faceplates the light angle can be adjusted.

Easily create the mood you want in your garden with our post lights, for example along a path or in a border.

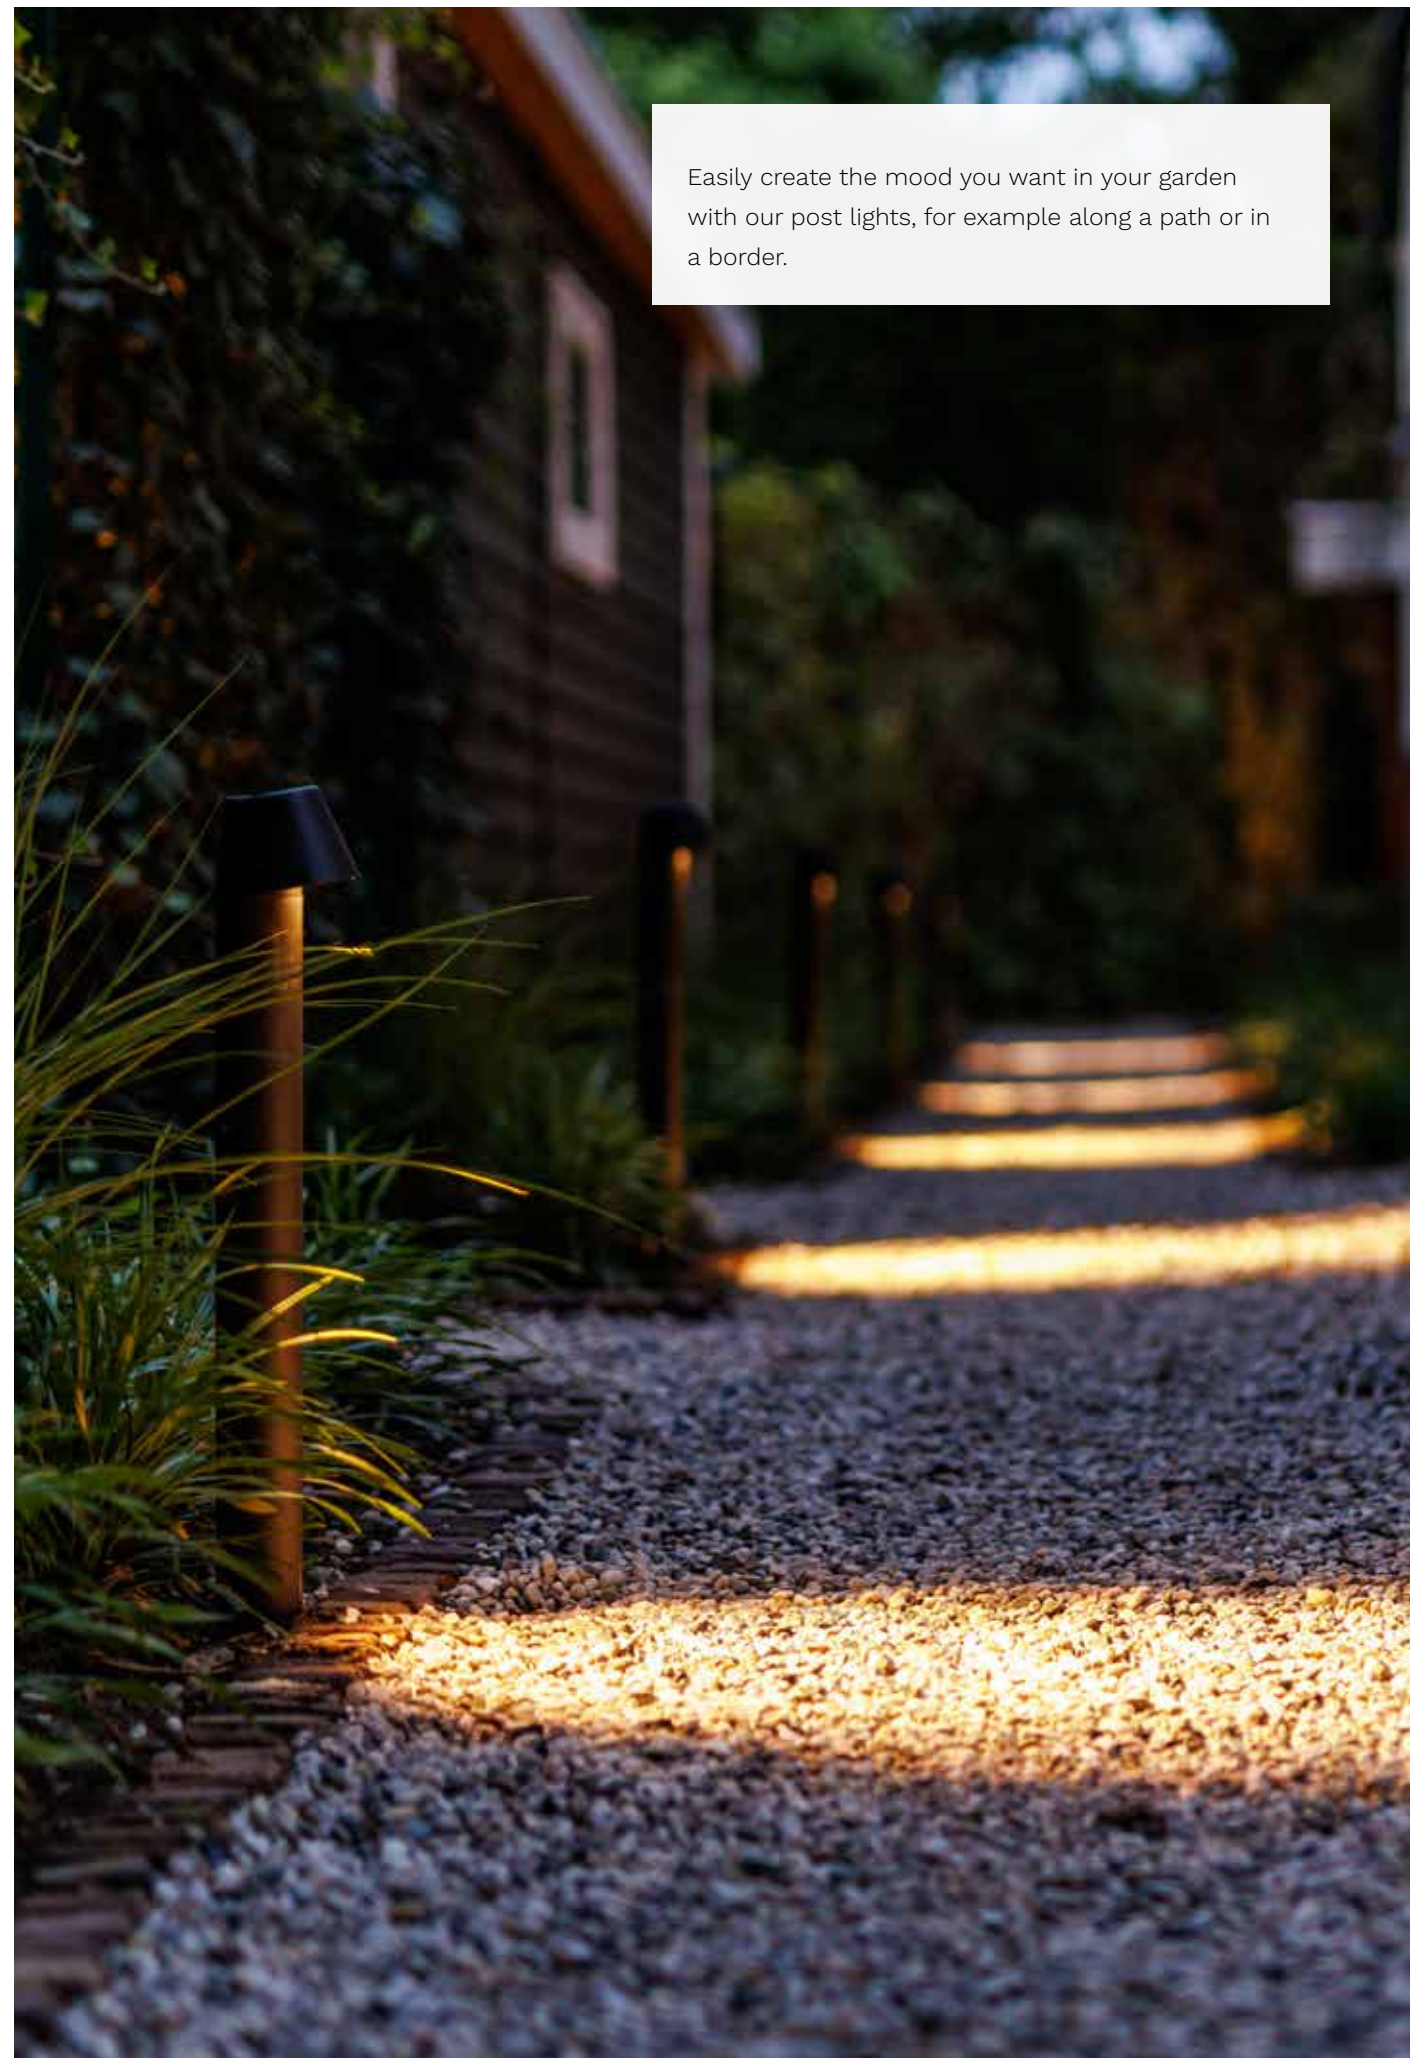

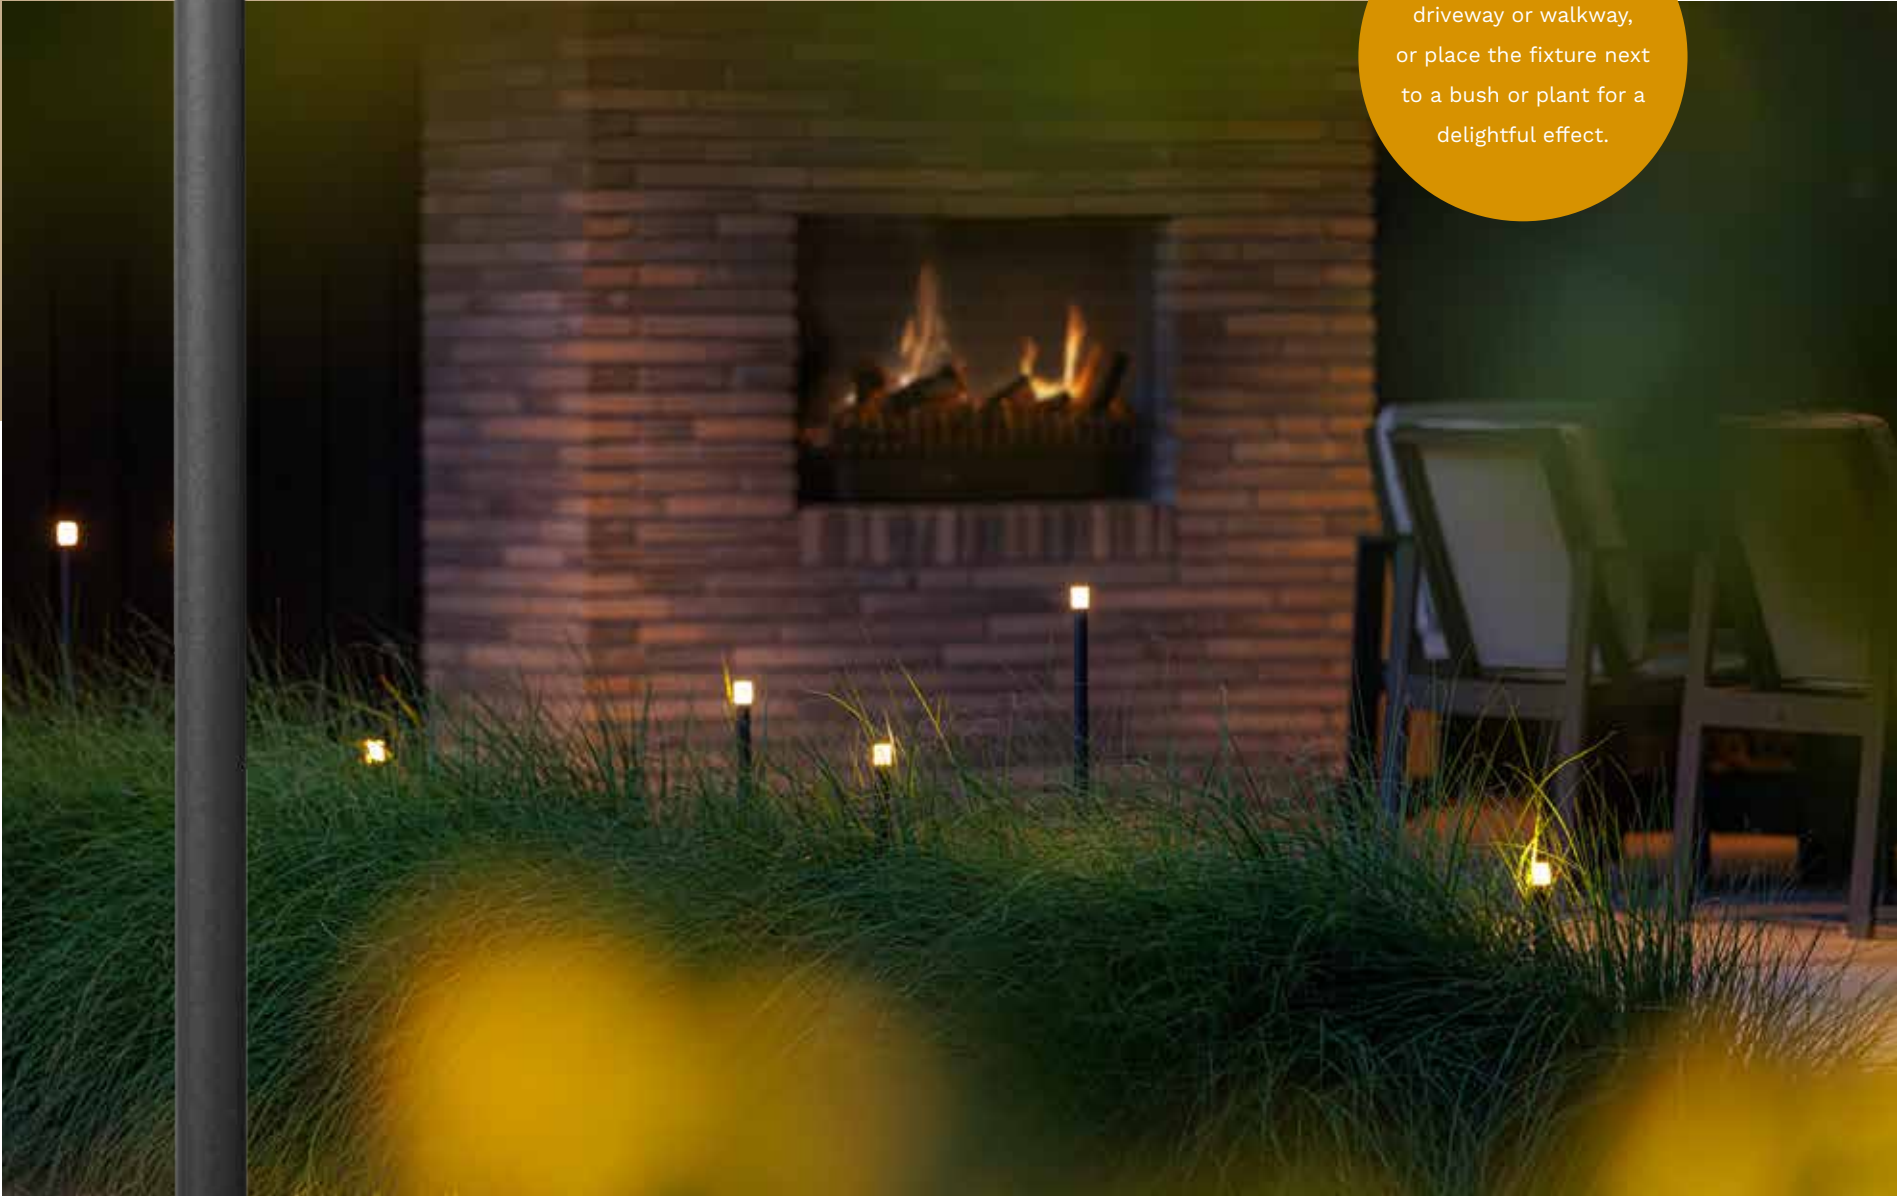

Accentuate your driveway or walkway, or place the fixture next to a bush or plant for a delightful effect.

Erba Mid (223P)

Aluminum - Anthracite
LED 1.1 W
3,000 K
15 lm
734 x 20 mm (H x Ø)



Erba Set (222P)

Aluminum - Anthracite
LED 1.1 W (3x)
3,000 K
15 lm each
Large 904 x 20 mm (H x Ø)
Medium 734 x 20 mm (H x Ø)
Small 564 x 20 mm (H x Ø)

• Each light is supplied with Connector F as standard.



Oberon Hi (191P)
Aluminum - Anthracite
LED 4 W
3,000 K
40 - 345 lm
665 x 64 mm (H x Ø)



Oberon Lo (190P)
Aluminum - Anthracite
LED 4 W
3,000 K
40 - 345 lm
420 x 64 mm (H x Ø)



Alon (221P)
Aluminum - Anthracite
LED 3.3 W
3,000 K
30 - 365 lm
700 x 64 x 160 mm (H x W x D)



Accentuate
your driveway
or walkway
with Alon.

• Each light is supplied with Connector F as standard.

New



Lino (264P)

Aluminum - Black

LED 6 W

3,000 K

27 - 140 lm

600 x 40 x 40 mm (H x W x D)



Filament



Eros Hi (214P)

Aluminum/glass - Black

LED 3.5 W

2,200 K

277 lm

870 x 115 mm (H x Ø)



Eros Lo (217P)

Aluminum/glass - Black

LED 3.5 W

2,200 K

277 lm

550 x 115 mm (H x Ø)

• Each light is supplied with Connector F as standard.

Wall lights



Tiga Wall (249W)


Aluminum - Black

LED 3.5 W

3,000 K

67 lm

75 x 75 x 42 mm (H x W x D)



The Tiga Wall comes with an additional faceplate. This creates a narrower light angle.

Lighting a fence, garden wall or canopy? This has never been easier than with our wall lights! Simply conceal the cable with the jack plug.





This unique dimmable light can be placed at any angle using the bracket provided.



Tiga Corner (208S)


Aluminum - Anthracite

LED 3.5 W

2,700 K

10 - 106 lm

46 x 93 x 105 mm (H x W x D)

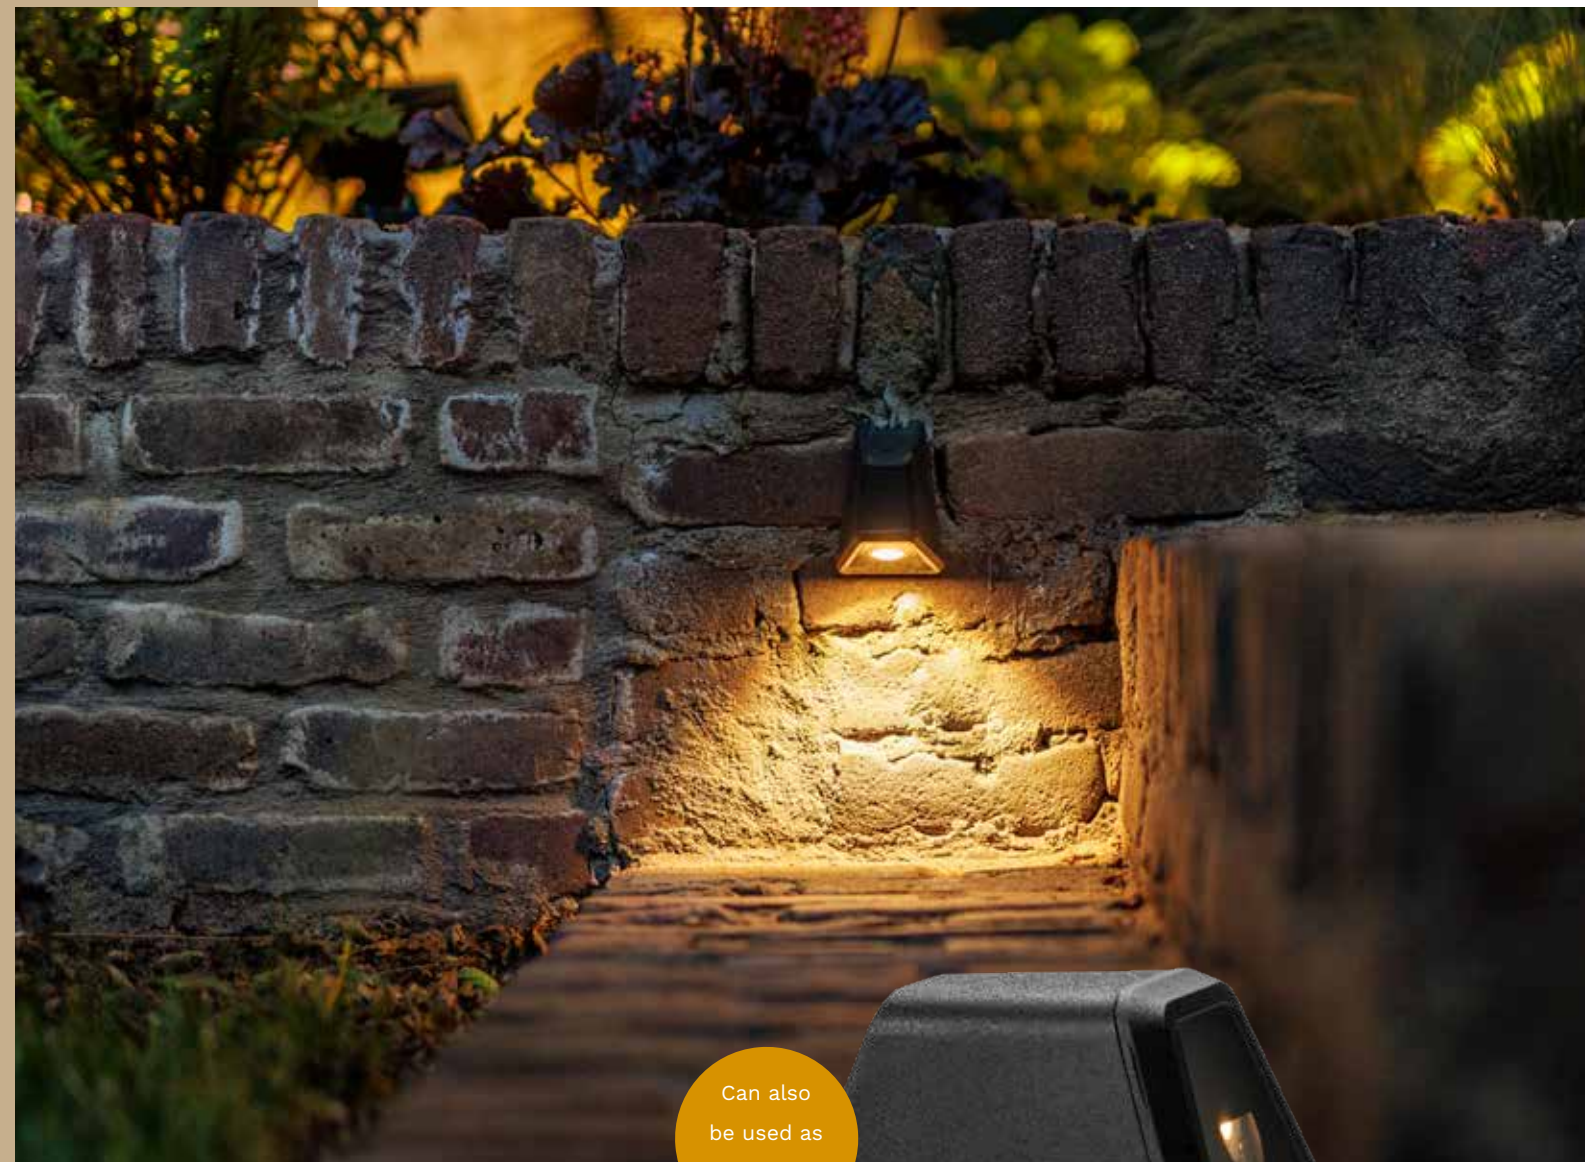

Can also be used as spotlight.



Tiga DL (209S)

Aluminum - Black


LED 4.2 W

3,000 K

9 - 85 lm

88 x 68 x 63 mm (H x W x D)



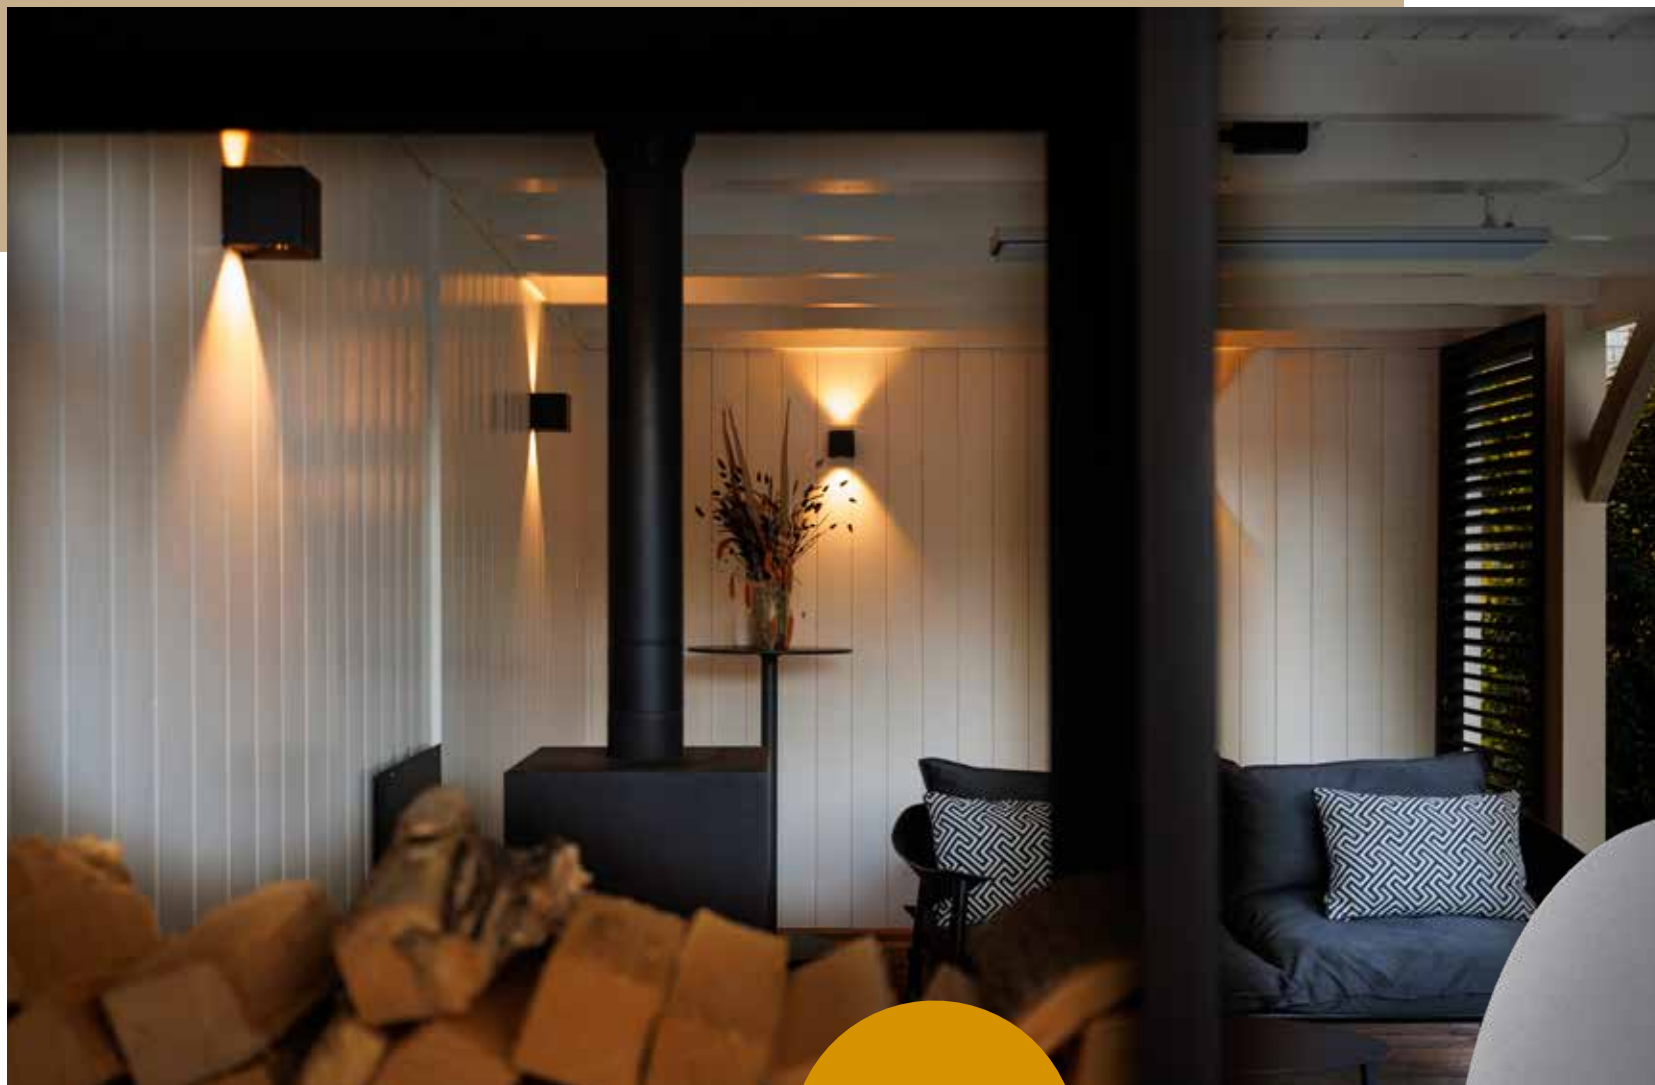

Ixion Small can be connected to a 230V power outlet.



Ixion 12V (182W)


Aluminum - Anthracite

LED 4.5W x2

3,000 K

45 - 575 lm

110 x 110 x 110 mm (H x W x D)



Ixion Small 230V (230W)


Aluminum - Anthracite

LED 3W x2

3,000 K

482 lm

100 x 100 x 100 mm (H x W x D)



Kuma (184W)

Aluminum - Black

LED 6 W

3,000 K

105 lm

145 x 35 mm (Ø x D)

The Tube can be used in combination with the Juno Tube and can either be placed in the ground or mounted on a wall using the accessories supplied.



Tube (215A)

Aluminum - Anthracite
1,200 x 20 mm (H x Ø)



Can also
be used as a
spotlight.



Quartz (196W)

Aluminum - Black
LED 1.8 W
3,000 K
137 lm
105 x 50 x 88 mm (H x W x D)



Juno Tube (213S)

Aluminum - Anthracite
LED 4 W
3,000 K
356 lm
85 x 55 x 68 mm (H x W x D)





Atik Smart (Zigbee) (246N)

Aluminum - Black

LED 5 W

211 lm

135 x 120 mm (H x Ø)

Drill hole 100 mm

Includes ground tube

Gateway required



New



Senso Smart (Zigbee) (265N)

Aluminum - Black
LED 7 W
640 lm
39 x 162 x 31 mm (H x W x D)
Gateway required

Deco 30 Smart (Zigbee) (254N)

Polyethylene - White
LED 5 W
254 lm
300 mm (Ø)
Gateway required

Deco 40 Smart (Zigbee) (255N)

Polyethylene - White
LED 5 W
242 lm
400 mm (Ø)
Gateway required

Deco 50 Smart (Zigbee) (256N)

Polyethylene - White
LED 5 W
220 lm
500 mm (Ø)
Gateway required

With groundspike and feet, easy to place on any surface.



Oberon Smart (Zigbee) (199N)

Aluminum - Anthracite
LED 5 W
212 lm
665 x 64 mm (H x Ø)
Gateway required



Castor Smart (Zigbee) (200N)

Aluminum - Anthracite
LED 5 W
207 lm
95 x 60 x 120 mm (H x W x D)
Gateway required





Use Gateway Smart to connect to the Lightpro Zigbee smart lights and the Zigbee Motion Sensor Smart. The Gateway Smart has to be added first before connecting other products. Please note: the Gateway Smart must be placed indoors, and permanently connected to a 230V power outlet using the adapter supplied.

Gateway Smart (Wi-Fi - Zigbee) (219A)

Plastic - Black

Range 20 meters (open field)

IP20

64 x 64 x 15 mm (H x W x D)

Smart



Camera Smart 12V (Wi-Fi) (218A)

Plastic - Black

71 x 66 x 188 mm (H x W x D)

IP65

Use 7 watt

- 2 megapixels camera for outdoor use
- 15 frames per second
- Cloud data storage (subscription)
- Local storage on micro SD card max. 128 GB
- Night vision (infrared)
- Combines motion with smart outdoor lighting
- Includes PIR motion sensor
- Detects motion up to 10m
- Detection angle 65 degrees
- Adjustable sensitivity
- Max. 40 meters from the router

Our 12-volt Camera Smart works on Wi-Fi and is easily connected to our 12V system. Review footage via the app or talk to the person at your front door via our Camera Smart! Everything is easy to operate via the Lightpro app. Mount it on the wall, fence, or your garden shed. Placement in the middle of the garden? Use the Multispike and Camera mounting kit.



Motion Sensor Smart (Zigbee) (227A)

Plastic - Black

Detection range up to 10 meters

Detection angle 120 degrees

Incl. 2 AAA batteries

70 x 70 x 32 mm (H x W x D)

Repel uninvited guests and ensure safety in your garden. The wireless Motion Sensor Smart operates using Zigbee. The advantage of Zigbee is that the products communicate with each other, giving you endless range. For optimal performance and detection, we recommend placing the Motion Sensor Smart at a minimum height of 80 cm. The Motion Sensor Smart is easy to install using the included magnetic wall mount.



Switch Smart (Wi-Fi) (238A)

Plastic - Black

Range 40 meters

IP44

75 x 70 x 30 mm (H x W x D)

Includes ground spike and wall mounting hardware.

Use the Switch Smart to easily control non-Smart lighting with the Lightpro app. The Switch Smart works on Wi-Fi and is connected in no time.



Need more information?
Visit our Smart page.

Accessories



Honeycomb Juno (251A)

Aluminum/plastic - Black

33 x 50 x 50 mm (H x W x D)

Easy to attach to the Juno 2, 4, and Juno Tube.




Honeycomb Castor (252A)

Aluminum/plastic - Black

39 x 64 x 64 mm (H x W x D)

Easy to attach to the Castor 4, 8, and 9.

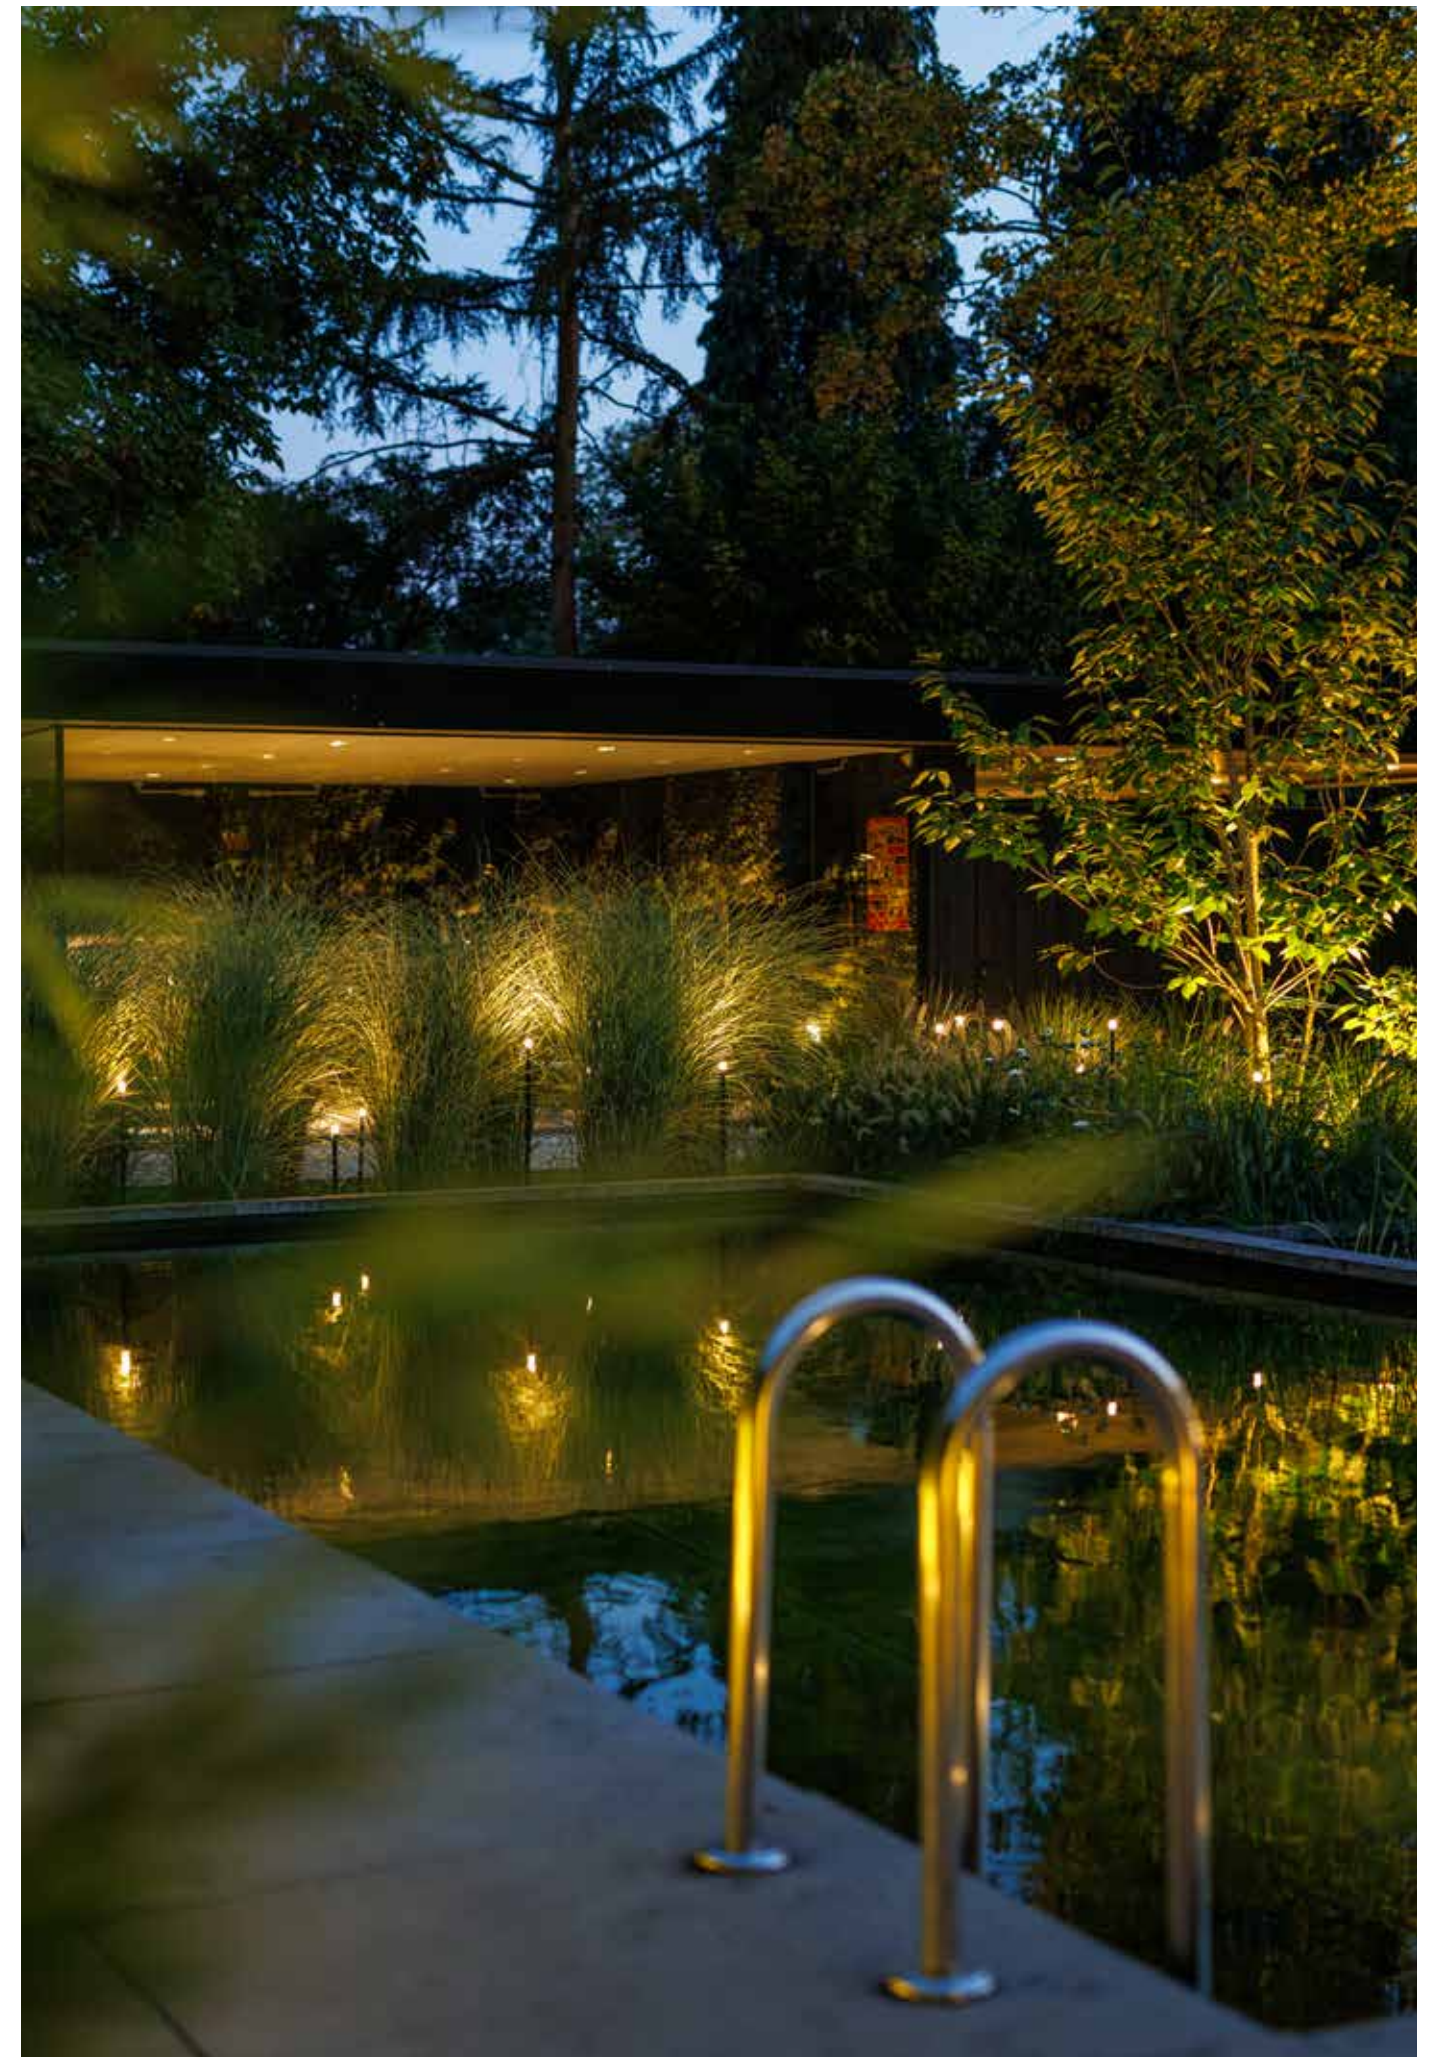


Decorative lights

Deco 30 Smart

Article number 254N | EAN code 8719979284572 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Polyethylene	Type	SMD LED (MR16)	Mounting material
Color	White	Replaceable	Yes	Connector F
Cable	1.5 m H05RN-F	Voltage	12 V AC/DC	Base
Length	300 mm	Start-up voltage	9V	Plug
Width	300 mm	Wattage	5 W	Light beam/-effect
Height	300 mm	Net luminous flux	254 lm	
		Light color (CCT)	RGB	
IP class	IP44	Light angle	All-round	
Protection class	III	Average lifetime	25,000 hours	
		CRI	-	
Smart	Yes, Zigbee	Switching on/off	10,000	
Required	Gateway	Dimmable	Yes (app)	
		Energy class	G	



Deco 40 Smart

Article number 255N | EAN code 8719979284589 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Polyethylene	Type	SMD LED (MR16)	Mounting material
Color	White	Replaceable	Yes	Connector F
Cable	1.5 m H05RN-F	Voltage	12 V AC/DC	Base
Length	400 mm	Start-up voltage	9V	Plug
Width	400 mm	Wattage	5 W	Light beam/-effect
Height	400 mm	Net luminous flux	242 lm	
		Light color (CCT)	RGB	
IP class	IP44	Light angle	All-round	
Protection class	III	Average lifetime	25,000 hours	
		CRI	-	
Smart	Yes, Zigbee	Switching on/off	10,000	
Required	Gateway	Dimmable	Yes (app)	
		Energy class	G	



Deco 50 Smart

Article number 256N | EAN code 8719979284596 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Polyethylene	Type	SMD LED (MR16)	Mounting material
Color	White	Replaceable	Yes	Connector F
Cable	1.5 m H05RN-F	Voltage	12 V AC/DC	Base
Length	500 mm	Start-up voltage	9V	Plug
Width	500 mm	Wattage	5 W	Light beam/-effect
Height	500 mm	Net luminous flux	220 lm	
		Light color (CCT)	RGB	
IP class	IP44	Light angle	All-round	
Protection class	III	Average lifetime	25,000 hours	
		CRI	-	
Smart	Yes, Zigbee	Switching on/off	10,000	
Required	Gateway	Dimmable	Yes (app)	
		Energy class	G	



LED strip

Article number 175L | EAN code 5907800859850 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Plastic	Type	SMD LED	Light beam/-effect
Color	White	Replaceable	No	
Cable	-	Voltage	12 V AC/DC	
Length	15 m	Start-up voltage	9V	
Width	10 mm	Wattage	2.2 Watt per meter	
Height	15 mm	Net luminous flux	90 lm / m	
Drill hole	-	Light color (CCT)	3,000 K	
IP class	IP67	Light angle	180°	Light beam/-effect
Protection class	III	Average lifetime	25,000 hours	
Required	LED strip connector	CRI	81	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	G	



Rodas

Article number 239R | EAN code 8719979284169 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Connector F
Color	Black	Replaceable	No	Light beam/-effect
Cable	3 m	Voltage	12 V AC/DC	
		Start-up voltage	9V	
Diameter	20 mm	Wattage	1.1 W (3x)	
Height	100 mm	Net luminous flux	15 lm each	
Drill hole	-	Light color (CCT)	3,000 K	
IP class	IP65	Light angle	-	Light beam/-effect
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	



Spotlights


Xible

Article number 224S | EAN code 8719979283667 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED (MR8)	Connector F
Color	Black	Replaceable	No	Groundspike
Cable	1.15 m SPT-1W	Voltage	12 V AC/DC	Wall mounting
Depth		Start-up voltage	9V	
Diameter	36 mm	Wattage	2 W	
Height	695 mm	Net luminous flux	153 lm	
Drill hole	-	Light color (CCT)	2,700 K	Light beam/-effect 
IP class	IP44	Light angle	30°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	84	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	


Xible Hi

Article number 263S | EAN code 8719979285043 | Warranty 6 years

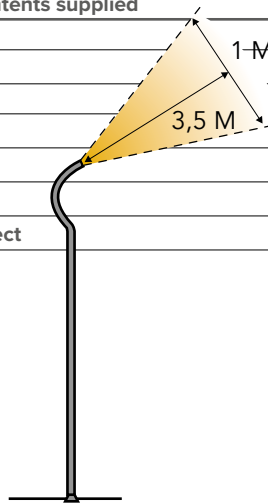Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Connector F
Color	Black	Replaceable	No	Groundspike
Cable	1.5 m H05RN-F	Voltage	12 V AC/DC	
Depth		Start-up voltage	9V	
Diameter	40 mm	Wattage	2.1 W	
Height	900 mm	Net luminous flux	187 lm	
Drill hole	-	Light color (CCT)	2,700 K	Light beam/-effect 
IP class	IP44	Light angle	21°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	


Tiga DL

Article number 209S | EAN code 8719979282110 | Warranty 6 years

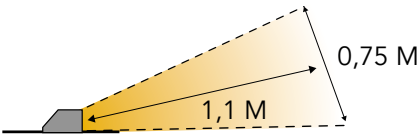Product		Light source		Accessories/contents supplied
Material	Plastic/Aluminum	Type	SMD LED	Mounting material
Color	Black	Replaceable	No	Connector F
Cable	3 m SPT-1W	Voltage	12 V AC/DC	Groundspike
Depth	63 mm	Start-up voltage	9V	Hex key
Width	68 mm	Wattage	4.2 W	Wall mounting
Height	88 mm	Net luminous flux	9 - 85 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP67	Light angle	90°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	83	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	G	


Castor 4

Article number 178S | EAN code 5907800859898 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	100 mm	Start-up voltage	9V	Hex key
Width	60 mm	Wattage	3.5 W	
Height	95 mm	Net luminous flux	40 - 415 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP67	Light angle	40°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	81	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	E	


Castor 8

Article number 179S | EAN code 5907800859904 | Warranty 6 years

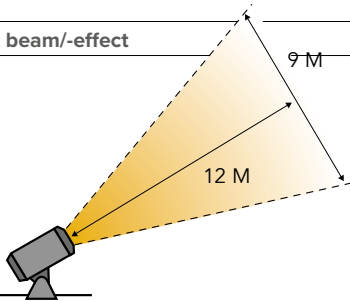Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	115 mm	Start-up voltage	9V	Hex key
Width	60 mm	Wattage	8 W	
Height	95 mm	Net luminous flux	80 - 768 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP67	Light angle	40°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	82	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	F	


Castor 9

Article number 180S | EAN code 5907800859911 | Warranty 6 years

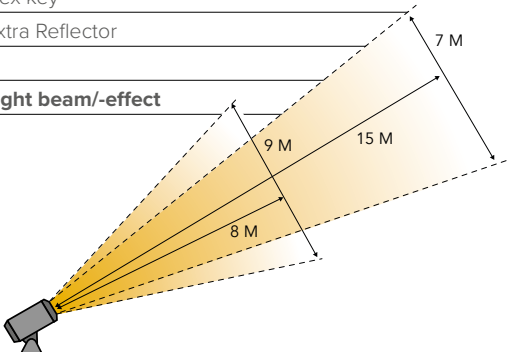Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	COB LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	120 mm	Start-up voltage	9V	Hex key
Width	60 mm	Wattage	9 W	Extra Reflector
Height	95 mm	Net luminous flux	65 - 670 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP44	Light angle	30° / 60°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	91	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	F	


Juno Tube

Article number 213S | EAN code 8719979282677 | Warranty 6 years

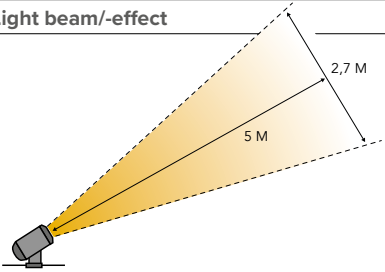Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	3 m	Voltage	12 V AC/DC	Hex key
Depth	68 mm	Start-up voltage	9V	
Width	55 mm	Wattage	4 W	
Height	85 mm	Net luminous flux	356 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP65	Light angle	30°	
Protection class	III	Average lifetime	25,000 hours	
Required	Tube	CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	


Juno 2

Article number 193S | EAN code 8719979280826 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	2 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	68 mm	Start-up voltage	9V	Hex key
Width	55 mm	Wattage	1.5 W	Base
Height	85 mm	Net luminous flux	160 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP67	Light angle	30°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	D	


Juno 4

Article number 194S | EAN code 8719979280833 | Warranty 6 years

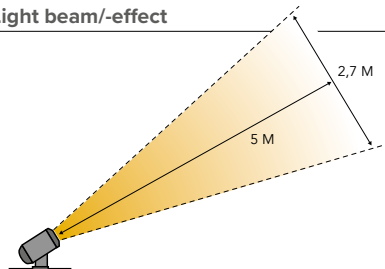Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	2 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	68 mm	Start-up voltage	9V	Hex key
Width	55 mm	Wattage	4 W	Base
Height	85 mm	Net luminous flux	356 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP67	Light angle	30°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	


Nilus

Article number 210S | EAN code 8719979282127 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	ABS	Type	SMD LED	Connector F
Color	Black	Replaceable	No	Mounting material
Cable	5 m H05RN-F	Voltage	12 V AC/DC	
Depth	110 mm	Start-up voltage	9V	
Width	95 mm	Wattage	3.4 W	
Height	135 mm	Net luminous flux	420 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP68	Light angle	30°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	82	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	




Avior

Article number 181S | EAN code 5907800859928 | Warranty 6 years

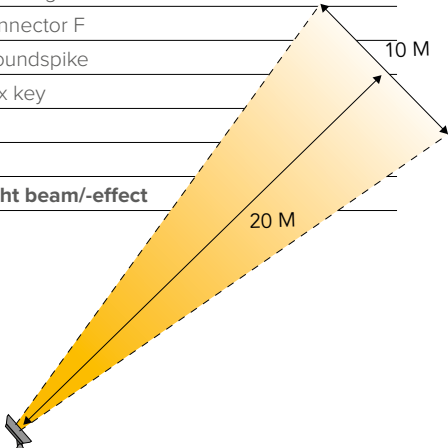Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	COB LED	Mounting material
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Groundspike
Depth	68 mm	Start-up voltage	9V	Hex key
Width	180 mm	Wattage	16 W	
Height	125 mm	Net luminous flux	1007 lm	
Drill hole	-	Light color (CCT)	3,000 K	Light beam/-effect 
IP class	IP44	Light angle	100°	
Protection class	III	Average lifetime	25,000 hours	
		CRI	80	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	F	

Spotlights

The object you want to illuminate is the most important factor when choosing the right spotlight. So take a good look at how much net luminous flux is needed to illuminate your entire tree or shrub.

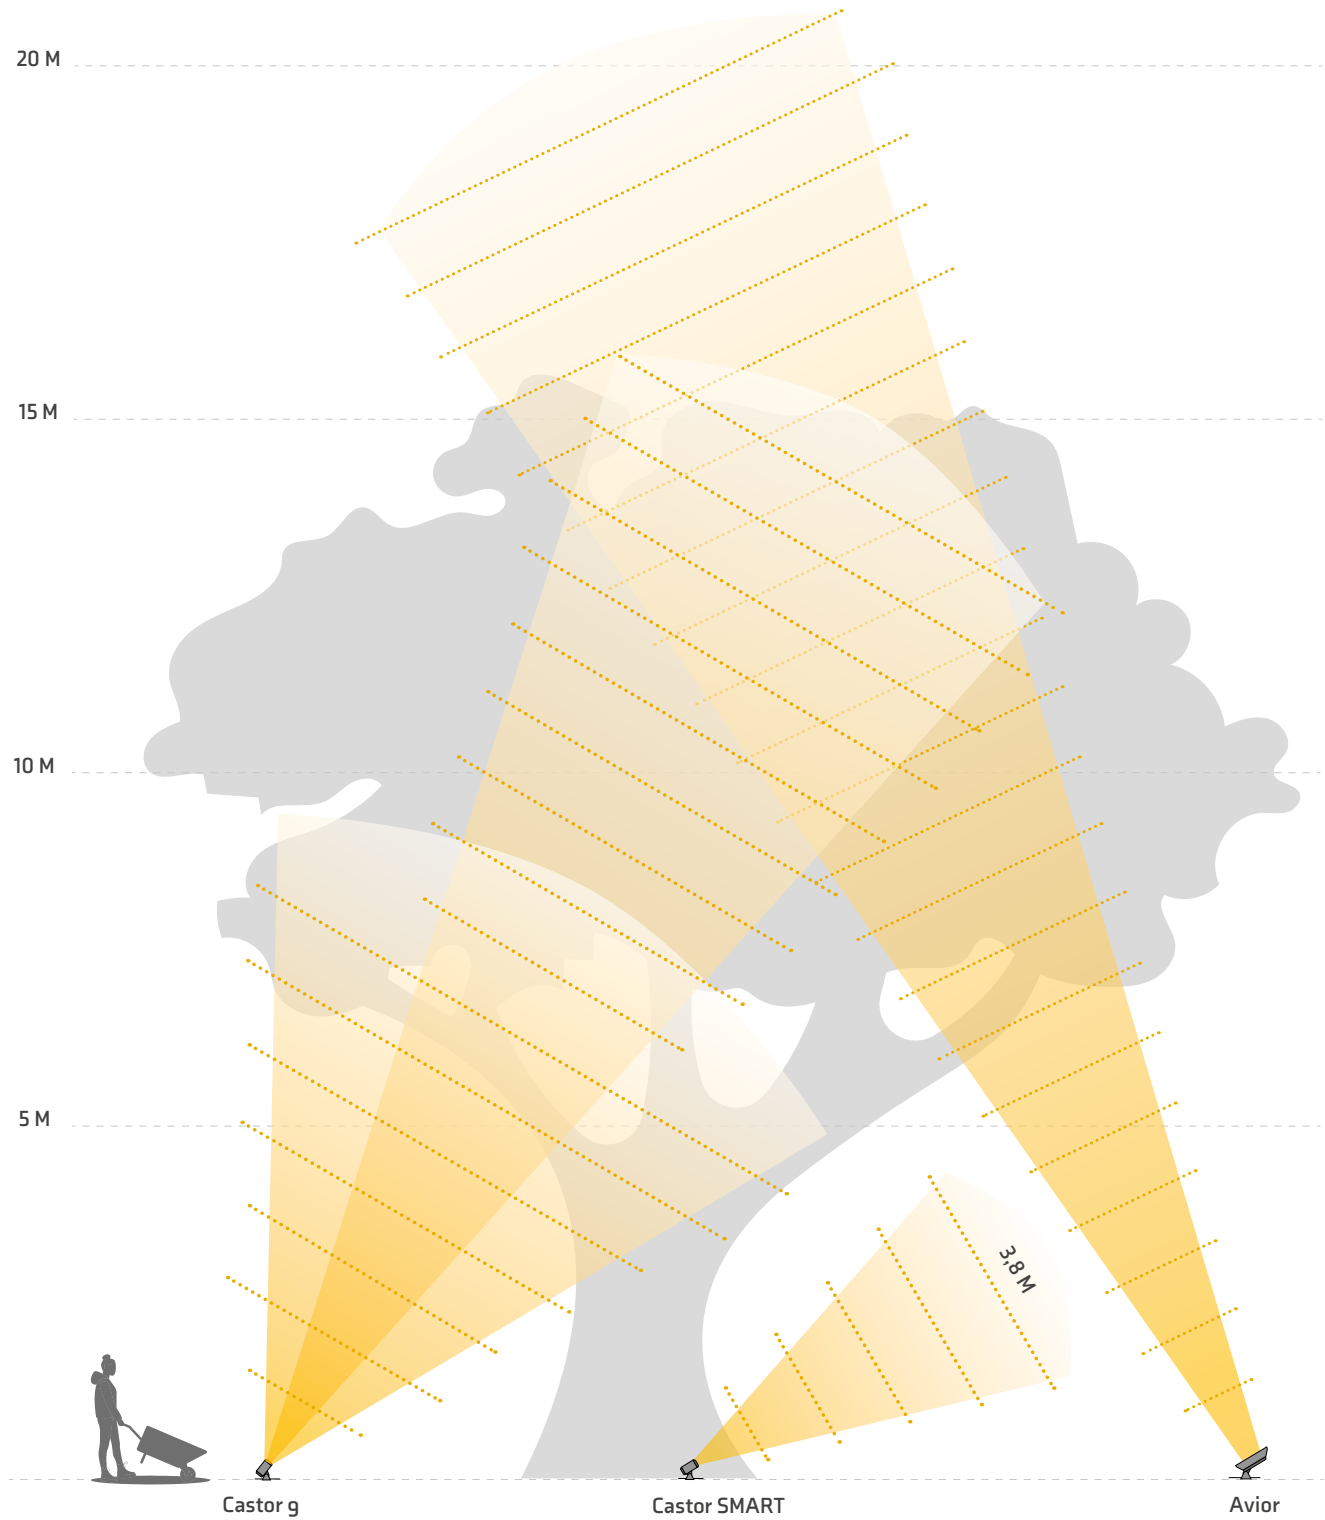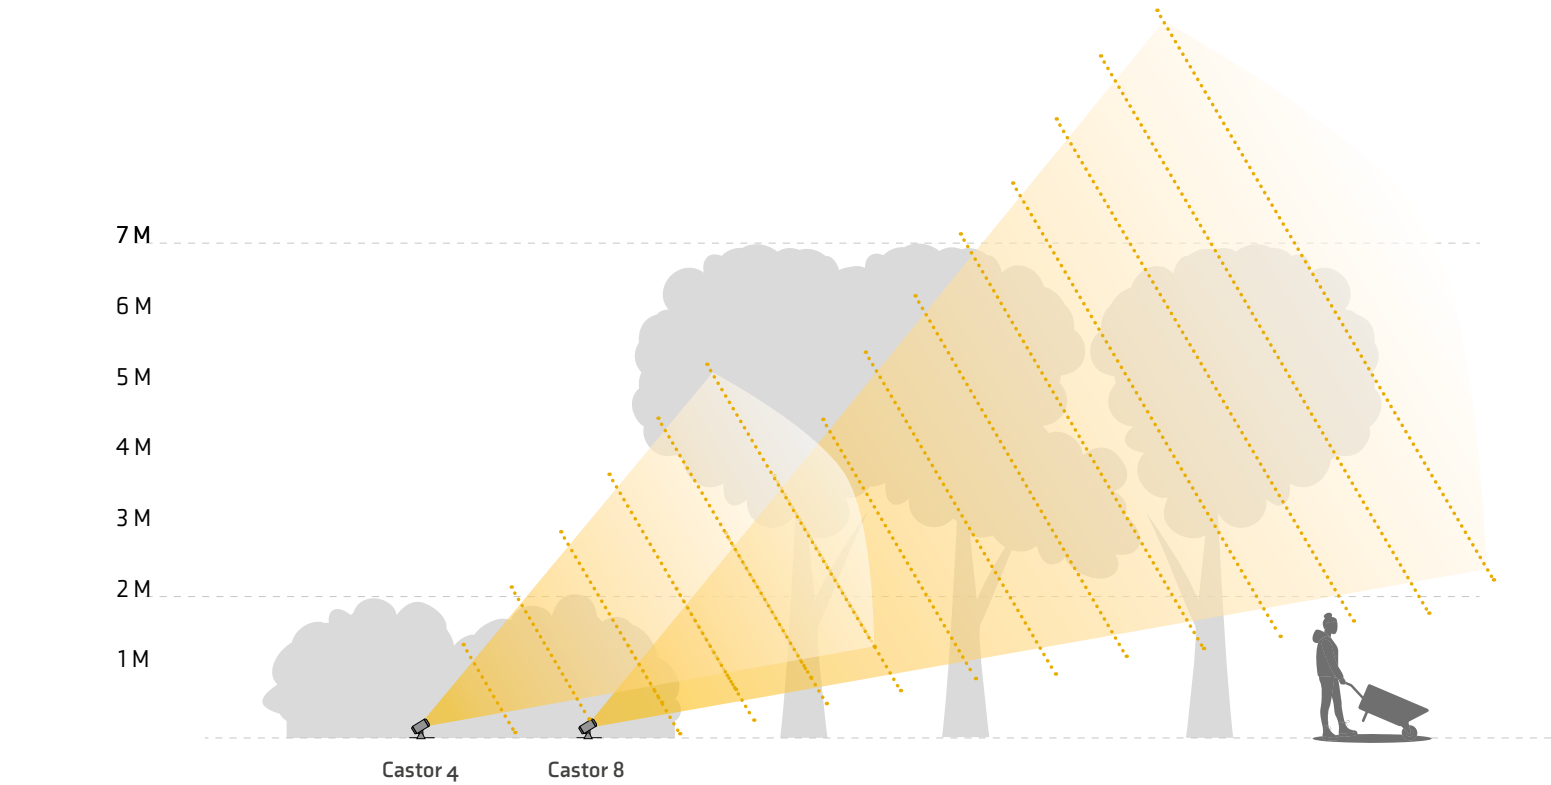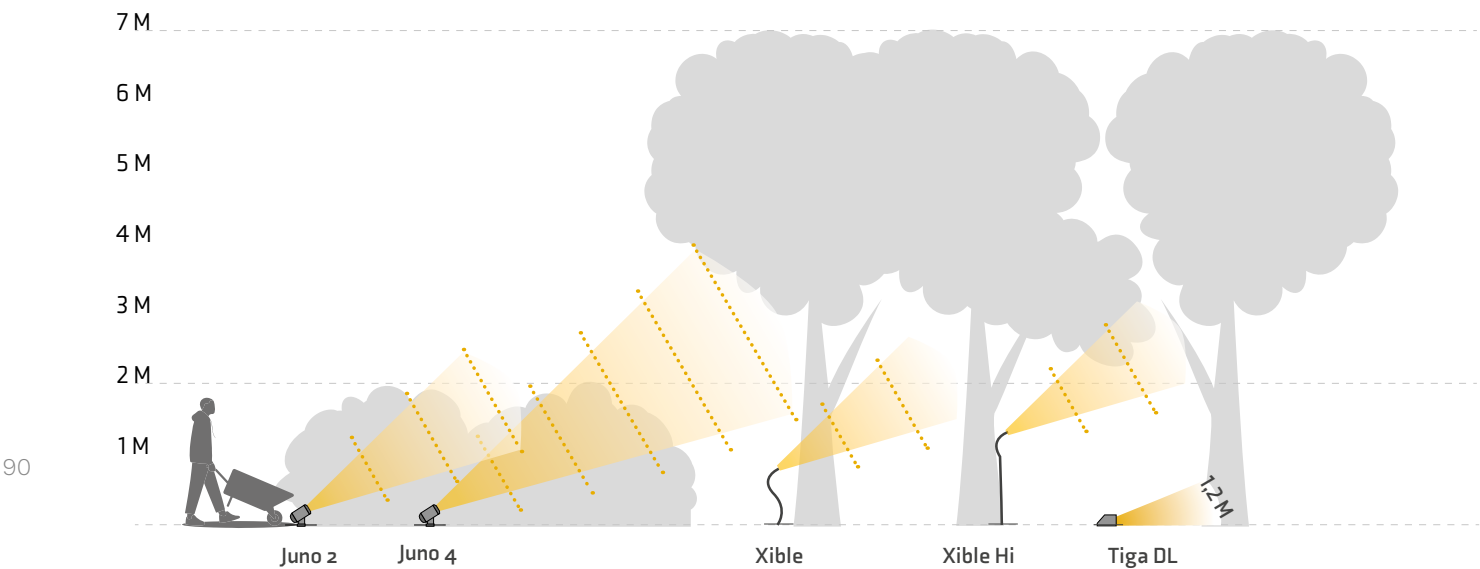

Decklights

Onyx 20

Article number 212D | EAN code 8719979282233 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Plastic	Type	SMD LED	Connector F
Color	Black	Replaceable	No	
Cable	1 m H05RN-F	Voltage	12 V AC/DC	
		Start-up voltage	9V	
Diameter	20 mm	Wattage	0.3 W	
Height	33 mm	Net luminous flux	1 lm	
Drill hole	20 mm	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP67	Light angle	-	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	80	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	-	



Onyx 30 RS

Article number 240D | EAN code 8719979284350 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Stainless steel 316	Type	SMD LED	Extra lenses
Color	Silver gray	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Ground tube
		Start-up voltage	9V	
Diameter	45 mm	Wattage	0.5 W	
Height	59 mm	Net luminous flux	1 lm	
Drill hole	30 mm	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP67	Light angle	65°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	-	

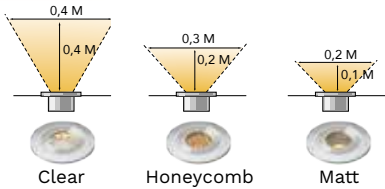

Onyx 30 RA

Article number 241D | EAN code 8719979284367 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Extra lenses
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Ground tube
		Start-up voltage	9V	
Diameter	45 mm	Wattage	0.5 W	
Height	59 mm	Net luminous flux	1 lm	
Drill hole	30 mm	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP67	Light angle	65°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	-	

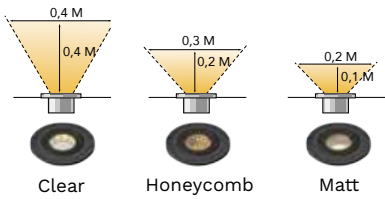

Onyx 60 RS

Article number 242D | EAN code 8719979284374 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Stainless steel 316	Type	SMD LED	Extra lenses
Color	Silver gray	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Ground tube
		Start-up voltage	9V	
Diameter	75 mm	Wattage	5 W	
Height	59 mm	Net luminous flux	5 lm	
Drill hole	60 mm	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP67	Light angle	65°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	84	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	-	

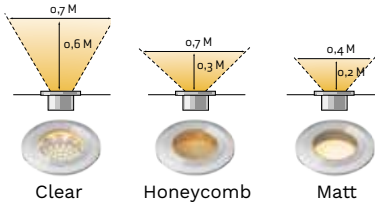

Onyx 60 RA

Article number 243D | EAN code 8719979284381 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Extra lenses
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Ground tube
		Start-up voltage	9V	
Diameter	75 mm	Wattage	5 W	
Height	59 mm	Net luminous flux	5 lm	
Drill hole	60 mm	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP67	Light angle	65°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	84	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	-	

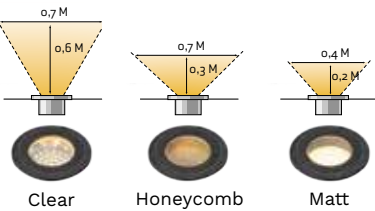

Onyx 90 RS

Article number 244D | EAN code 8719979284398 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Stainless steel 316	Type	SMD LED	Extra lenses
Color	Silver gray	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Ground tube
		Start-up voltage	9V	
Diameter	105 mm	Wattage	2 W	
Height	59 mm	Net luminous flux	18 lm	
Drill hole	90 mm	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP67	Light angle	80°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	84	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	G	

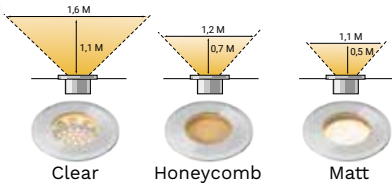


Onyx 90 RA

Article number 245D | EAN code 8719979284404 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Extra lenses
Color	Anthracite	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Ground tube
		Start-up voltage	9V	
Diameter	105 mm	Wattage	2 W	
Height	59 mm	Net luminous flux	18 lm	
Drill hole	90 mm	Light color (CCT)	2,700 K	Light beam/-effect
IP class	IP67	Light angle	80°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	Yes (car)	CRI	84	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	G	

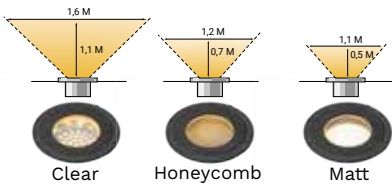


Decklights are most commonly used as orientation lighting. The table below allows you to easily compare the different decklights and choose exactly the right light.

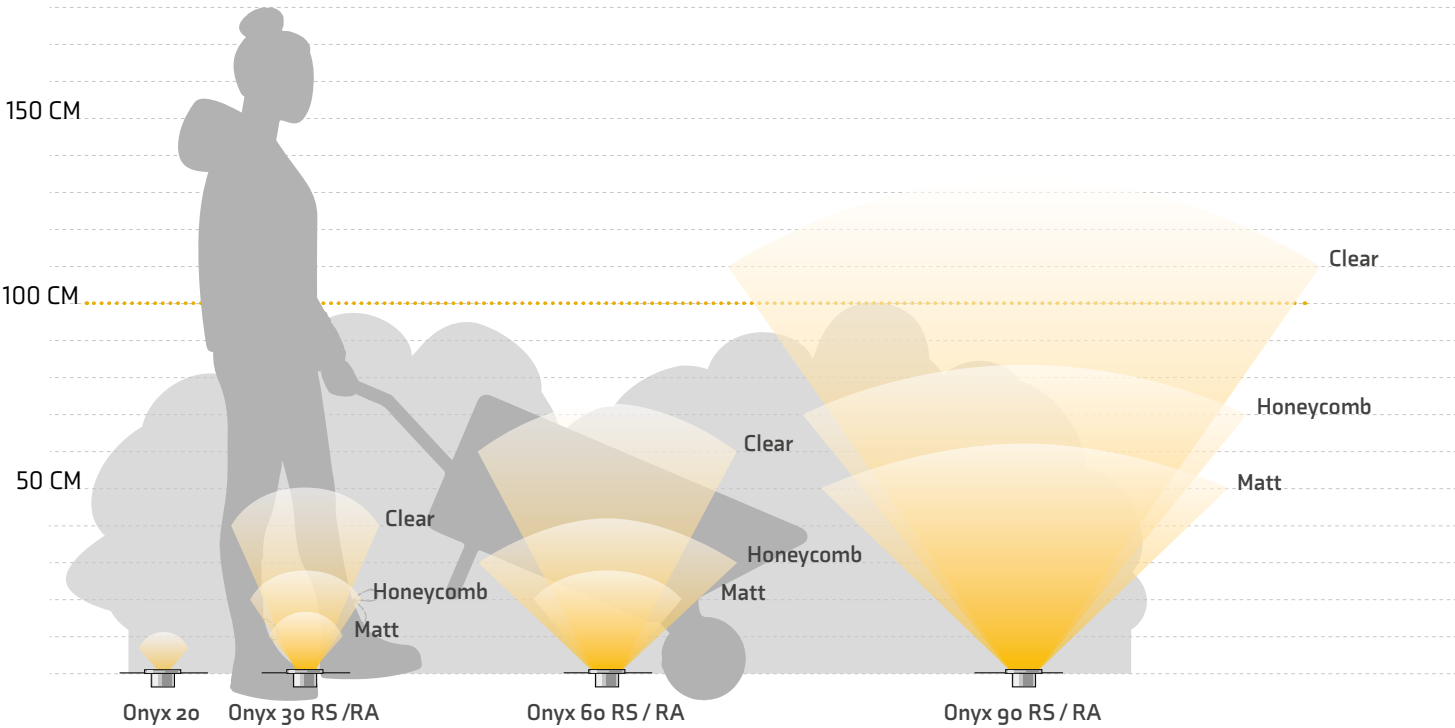

Atik R1

Article number 186U | EAN code 5907800859973 | Warranty 6 years


Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	COB LED	Ground tube
Color	Black	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	Hex key
		Start-up voltage	9V	Extra Reflector
Diameter	120 mm	Wattage	9 W	
Height	135 mm	Net luminous flux	65 - 713 lm	
Drill hole	100 mm	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP67	Light angle	30° / 60°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	No	CRI	91	
		Switching on/off	10,000	
		Dimmable	Yes	
		Energy class	F	

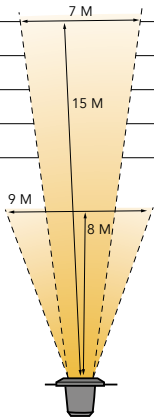

Nomia

Article number 207U | EAN code 8719979282097 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Aluminum	Type	SMD LED	Ground tube
Color	Black	Replaceable	No	Connector F
Cable	1 m H05RN-F	Voltage	12 V AC/DC	
		Start-up voltage	9V	
Diameter	90 mm	Wattage	3 W	
Height	125 mm	Net luminous flux	344 lm	
Drill hole	70 mm	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP67	Light angle	40°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	No	CRI	82	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	



Agate

Article number 102U | EAN code 5907800856774 | Warranty 6 years

Product		Light source		Accessories/contents supplied
Material	Stainless steel 316	Type	SMD LED (MR16)	Ground tube
Color	Silver gray	Replaceable	Yes	Connector F
Cable	0.5 m H05RN-F	Voltage	12 V AC/DC	Hex key
		Start-up voltage	9V	
Diameter	115 mm	Wattage	2.6 W	
Height	113 mm	Net luminous flux	195 lm	
Drill hole	90 mm	Light color (CCT)	3,000 K	Light beam/-effect
IP class	IP67	Light angle	36°	
Protection class	III	Average lifetime	25,000 hours	
Driveable	No	CRI	83	
		Switching on/off	10,000	
		Dimmable	No	
		Energy class	F	

